


SOUNDBAR QUICK START GUIDE

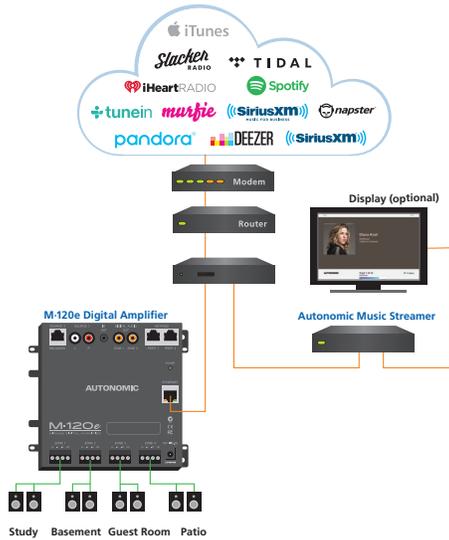

Click Control or Configure on your streamer

If your streamer still does not appear in this list, please make sure that it is powered on and connected to the internet.

| SKU | Name | Service Tag | MAC | IP | Control | Configure |
|--------|------------------|-------------------|--------------|---------------|-----------|-------------|
| MMS-1e | MMS-2CC6 | 410-30-1603210318 | 0060C2FD2CC6 | 192.168.1.148 | [Control] | [Configure] |
| MMS-1e | mms-1-clave-desk | 411-30-1612120476 | 70B3D59736A9 | 192.168.1.138 | [Control] | [Configure] |
| MMS-1e | ovrc-cabin-mms | 411-30-1612120573 | 70B3D597370A | 192.168.1.132 | [Control] | [Configure] |

| Mirage Audio System | | | | | |
|---------------------------------|--------|---------|----------|-----------------|----------|
| Machine | System | Content | Schedule | Control Systems | Firmware |
| Firmware | | | | | |
| Current firmware 6.1.20180502.1 | | | | | |



Connect Devices

Connect Ethernet and power to all eSeries streamers and amps.

- When using eSeries amplifiers, no physical audio connection is necessary.
- Non-eSeries and non-Autonomomic amplifiers should be connected to the streamer's physical audio outputs.

Discover and Update Devices

1. Go to setup.tunebridge.com from a browser or mobile device that is connected to the same network. All local streamers will be discovered.
2. Click on **Config** next to a streamer to open it's UI.
3. Without making any other changes, click on the **Firmware Tab** once the UI opens to update the firmware if an update is available.
4. Repeat steps 1-3 for each streamer if more than one is in the system.

Discover Devices and Play Music


1. Go to setup.tunebridge.com from a browser or mobile device that is connected to the same network. All local streamers will be discovered.
2. Click **Control** next to any of the discovered streamers. The Mirage Web UI will load.
 - You may need to enable Flash.
3. Turn on the zone you want to play content in.

If using eSeries amps:

- Select **Zones**, then click the power button next to the zone you want to turn on.

If using non-eSeries or non-Autonomomic amplifiers:

- Click **Sources**, then select **player A**.
4. Click **Streaming**.
 5. Scroll the services list down and select **TuneIn Radio**. (TuneIn is a free service that does not require any login).
 6. Select Local Radio.
 7. Click FM.
 8. Click one of the first stations in the list.
 9. Congratulations! Music should begin playing in the previously selected zone (or the first physical output if physically connected amp).

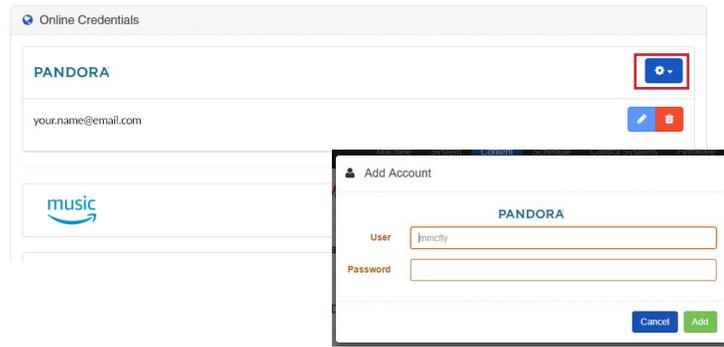

Add Services

1. Go to setup.tunebridge.com and click on the **Config** link next to your streamer.
2. Go to the **Content Tab**.
3. Scroll down to the **Online Credentials** section.
4. Click the gear beside the service you want to add and select **Add Account**.
5. Follow the prompts to login to your service account.

Note: Ensure pop-ups are not blocked as some services require a pop-up window.

Name Zones

1. Go to setup.tunebridge.com and click on the **Config** link next to your streamer.
2. Go to the **System Tab**.
3. If using eSeries amps:
 - Scroll down to the **Amplifiers** section. This section will list all discovered amps with the same system ID as your streamer (default system ID is 1).
 - Select the gear next to your amplifier and select **Edit**.
 - Under **Zone Name**, click the zone you want to change
 - Type the new name. You must press **Enter** for the changes to take effect.
 - Click **Done**.
4. If using non-eSeries or non-Autonomic amplifiers:

- Scroll down to the **Streamers** section.
- Select the gear next to your streamer and select **Edit**.
- Under **Output Name**, click the Player you want to change.
- Type the new name. You must press **Enter** for the changes to take effect.
- Repeat for other players.

For all other configuration details, view the user's manual on the product support tab at www.snapav.com.

TuneBridge™

Control support for iPhone, iPad and Android devices is available by downloading the Tunebridge app from the Apple App Store or Google Play store.

