




SUNBRITE

INSTALLATION MANUAL SB-AW-SNDBR-X-B

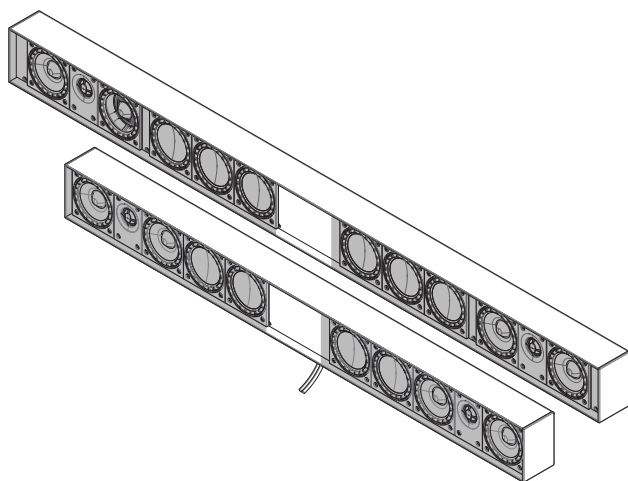

IMPORTANT INSTRUCTIONS AND CONSIDERATIONS

Read and understand all instructions. Before beginning installation, carefully plan location accounting for potential electrical, plumbing or other obstacles.

RECOMMENDED AMPLIFIER POWER

An amplifier or receiver with a power rating between 20 and 90 Watts RMS per channel is recommended. The Signature and Pro Series SunBriteTVs have an internal amplifier that can be used to drive the soundbar.

SPEAKER WIRE

Connect the Sound bar to an AV Receiver or Amplifier using high-quality 14 to 16 gauge stranded speaker wire. Connect the wire directly to the speaker's binding posts. You need 2 runs of speaker wire to the Sound bar location as it contains left and right speakers. Use the included DIN cable to connect the soundbar to a SunBriteTV. See page 5 for more information.

CONTENTS

SB-AW-SNDBR-S-B

- (1) DIN cable w/90 cm cable for compatible SunBriteTVs
- (1) DIN Cable to 3.5mm adapter for SunBrite Veranda TV's
- (1) Speaker Mount Bracket Small
- (4) 1/4-20 x .25" Screws
- (4) 1/4-20 Flat Washers

SB-AW-SNDBR-M-B

- (1) DIN cable w/90 cm cable for compatible SunBriteTVs
- (1) DIN Cable to 3.5mm adapter for SunBrite Veranda TV's
- (1) Speaker Mount Bracket Large
- (2) 8-32 x 1/2" threaded standoff*
- (2) 8-32 x 7/8" threaded standoff*
- (4) 1/4-20 x .25" Screws
- (4) 1/4-20 Flat Washers
- (4) 6/8MM X 20MM Black Nylon non-threaded spacers
- (4) 1/4-20 x 1.25" Screws

***CAUTION:** 8-32 Threaded Standoffs are NOT compatible with Solis metric speaker bar mount points. Mount speaker bar using the M4 metric screw supplied with the TV.



INSTALLATION

SPEAKER PLACEMENT

The SB-AW-SNDBR-S-B and SB-AW-SNDBR-M-B are designed to be the Left and Right speakers of a sound system. For most applications, place below a flat screen TV using the included mounting bracket.

Installing on a SunBriteTV


Mount the SB-AW-SNDBR-S-B, and SB-AW-SNDBR-M-B directly above or below Signature and Pro Series SunBriteTVs and below Veranda Series SunBriteTVs with the included bracket. The bracket attaches the soundbar using spacers or directly to the TV.

To determine which installation diagram to use for your SunBrite TV, refer to the table below.


NOTE: The Strong™ universal bracket SM-SBAR-BKT-UNIV (available separately) should be used when attaching the soundbar to any display other than a SunBriteTV.

| Solis | | |
|---------------------------------------|----------------------------|---------------------|
| <i>Size Model</i> | <i>Premium Speaker Bar</i> | <i>Installation</i> |
| (49") SB-FS-49-BL | SB-AW-SNDBR-S-B | Figure A |
| (55") SB-FS-55-BL | SB-AW-SNDBR-M-B | Figure A |
| (65") SB-FS-65-BL | SB-AW-SNDBR-M-B | Figure A |
| (75") SB-FS-75-BL | SB-AW-SNDBR-M-B | Figure A |
| Veranda 3: 4K HDR Series Smart | | |
| <i>Size Model</i> | <i>Premium Speaker Bar</i> | <i>Installation</i> |
| (55") SB-V3-55-4KHDR-BL | SB-AW-SNDBR-M-B | Figure B |
| (65") SB-V3-65-4KHDR-BL | SB-AW-SNDBR-M-B | Figure B |
| (75") SB-V3-75-4KHDR-BL | SB-AW-SNDBR-M-B | Figure B |
| Veranda 2: 4K HDR Series | | |
| <i>Size Model</i> | <i>Premium Speaker Bar</i> | <i>Installation</i> |
| (43") SB-V-43-4KHDR | SB-AW-SNDBR-S-B | Figure A |
| (55") SB-V-55-4KHDR | SB-AW-SNDBR-M-B | Figure B |
| (65") SB-V-65-4KHDR | SB-AW-SNDBR-M-B | Figure B |
| (75") SB-V-75-4KHDR | SB-AW-SNDBR-M-B | Figure B |
| Signature 2: 4K HDR Series | | |
| <i>Size Model</i> | <i>Premium Speaker Bar</i> | <i>Installation</i> |
| (43") SB-SE-43-4K | SB-AW-SNDBR-S-B | Figure A |
| (43") SB-S2-43-4K | SB-AW-SNDBR-S-B | Figure A |
| (55") SB-S2-55-4K | SB-AW-SNDBR-M-B | Figure B |
| (65") SB-S2-65-4K | SB-AW-SNDBR-M-B | Figure B |
| (75") SB-S2-75-4K | SB-AW-SNDBR-M-B | Figure B |
| Pro 2 Series | | |
| <i>Size Model</i> | <i>Premium Speaker Bar</i> | <i>Installation</i> |
| (32") SB-P2-32-1K | N/A | N/A |
| (43") SB-P2-43-1K | SB-AW-SNDBR-S-B | Figure A |
| (49") SB-P2-49-4K | N/A | N/A |
| (55") SB-P2-55-4K | SB-AW-SNDBR-M-B | Figure C |
| (65") SB-P2-65-4K | SB-AW-SNDBR-M-B | Figure C |

Figure A: Installation using no spacers

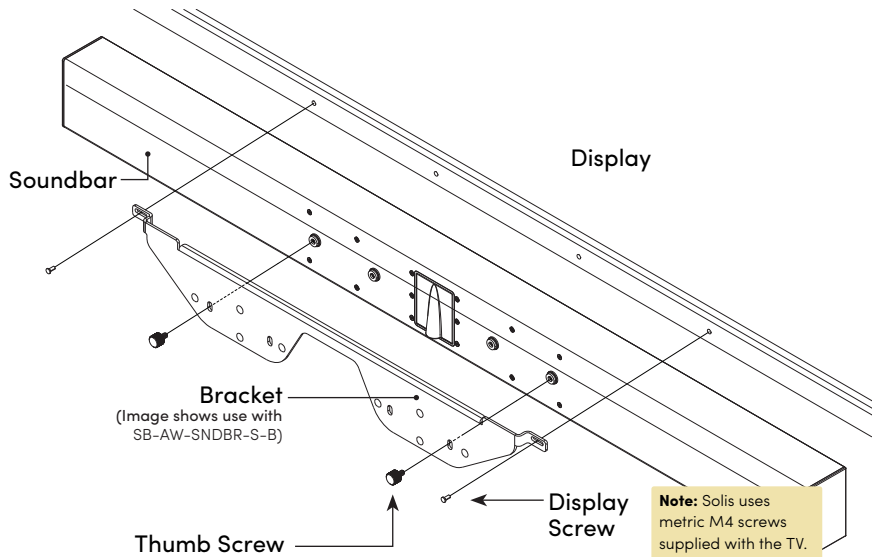


1. Locate and remove the display screws from the display.
2. Set the bracket in place against the display and replace the screws to secure.
3. Remove the thumb screws from the sound bar and set it in place against the bracket.
4. Replace the thumb screws to secure the soundbar to the bracket.

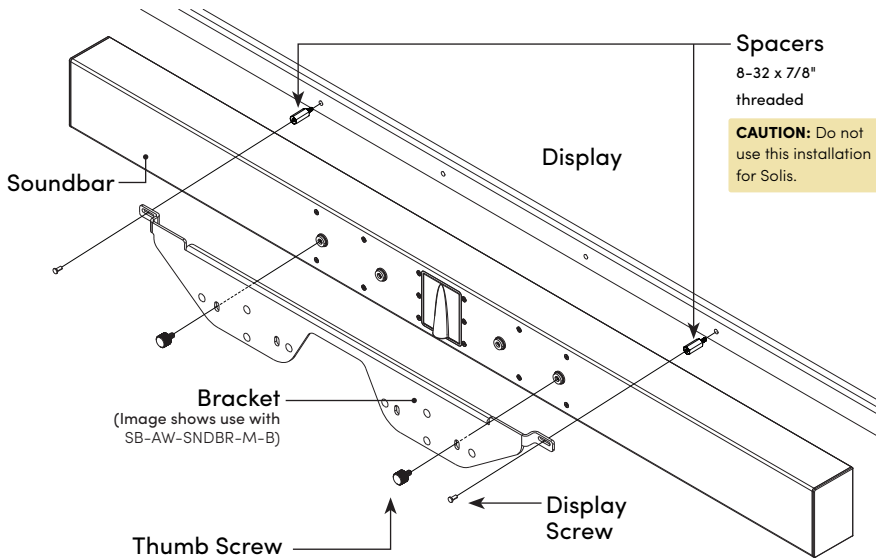Figure B: Installation using display spacers

1. Locate and remove the display screws from the display.
2. Screw the spacers into the display.
3. Set the bracket in place against the spacers and, using the display screws removed in Step 1, secure the bracket to the spacers.
4. Remove the thumb screws from the sound bar and set it in place against the bracket.
5. Replace the thumb screws to secure the soundbar to the bracket.

Figure C: Installation using soundbar spacers

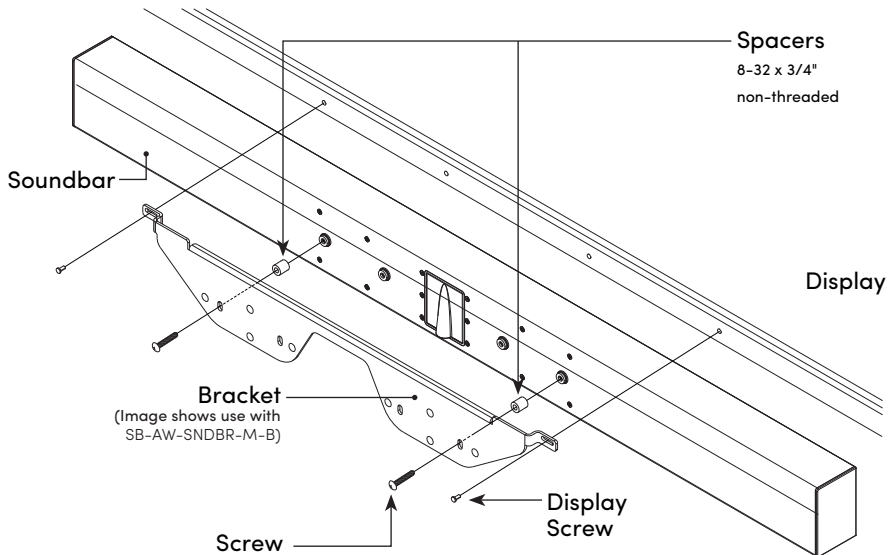

1. Locate and remove the display screws from the display.
2. Set the bracket in place against the display. Using the display screws removed in Step 1, secure the bracket to the display.
3. Remove the screws from the soundbar.
4. Insert the soundbar screws (removed in Step 3) into the bracket and place the spacers on the screws.
5. Set the soundbar in place against the spacers.
6. Fasten the screws to secure the soundbar to the bracket.

CONNECTING AND CALIBRATING


Proper connections are important to the performance of any speaker within an audio system.


Performing the following steps will ensure proper connections for optimum speaker performance:

1. At each speaker connection, ensure that the outer jacket is separated by at least 2 inches.
2. Strip the insulation on each conductor approximately $\frac{1}{4}$ " and insert into the speaker terminals.
 - Ensure that there are no stray strands of wire protruding from the connectors.
 - Observe proper polarity (+ to + and – to –) for each speaker and at the amplifier).
3. Turn on the home theater receiver and calibrate all speakers in the system according to the receiver (or surround processor) manufacturer's instructions.

Connecting to a SunBriteTV

Connect the sound bar to Signature and Pro Model SunBriteTVs using the included 5 pin male connector wire (DIN Cable). Connect the wire ends as shown in the diagram below. Veranda Models will require an additional 3.5mm 4 wire to DIN adapter, included.

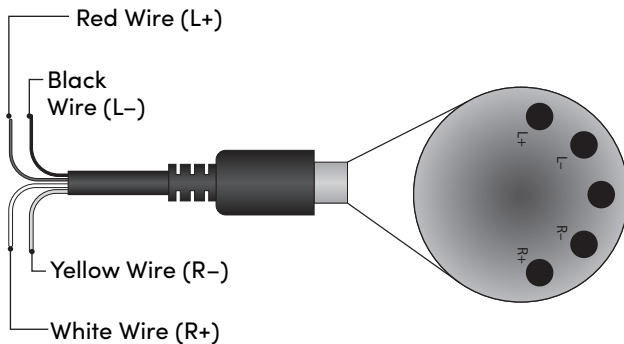

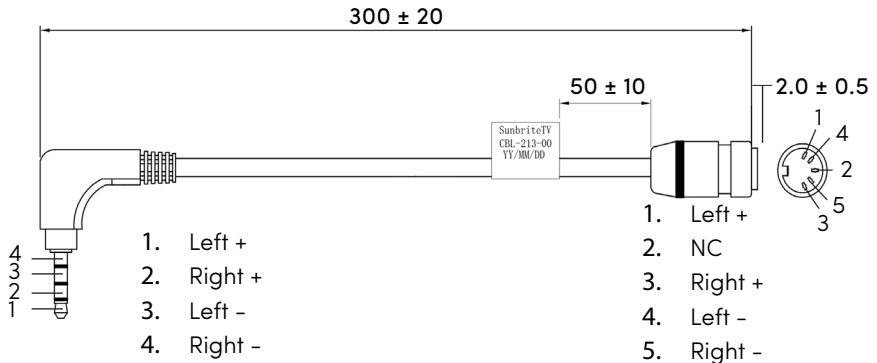

When connecting the sound bar to a SunBrite Veranda TV, the DIN to 3.5 mm adapter must also be used. The 3.5 mm side attaches to the audio output of the Veranda TV, and the DIN connector side attaches to the DIN cable adapter, shown above. Then, connect the DIN cable adapter to the speaker inputs of the sound bar as indicated.

Verifying Phase

When proper polarity is not maintained, the speakers play at the opposite 'time' from each other, or out of phase. The result is audio with lack of bass and vocals that sound thin or distant. If during or after calibrating your receiver you suspect the sound is not right and you cannot see any markings on the wire to verify polarity is correct, try this simple test:

1. Sit in the normal listening position for the system.
2. Play some music with your receiver set to Mono.
3. Listen to the music and observe the audio.
 - Does the bass sound full and even with the other audio?
 - Do the vocals sound centered and even in volume?

If either of the answers are YES, follow steps 3 and 4 with any other speakers in the system.

4. Turn off your receiver and reverse the connections for one of the speakers.
5. Repeat your test at the same volume level. When the sound has the loudest and best sounding bass, and vocals are centered and clear, your connections are correct and in-phase.

CLEANING

Use a dampened soft cloth or paper towel to clean the cabinet. The grill is best cleaned by brushing it off with a lint-free cloth.

SPECIFICATIONS

| Product | SB-AW-SNDBR-S-B | SB-AW-SNDBR-M-B |
|---------------------|---|---|
| Frequency response | 100 Hz-22 kHz | 95 Hz-22 kHz |
| Color | Black | Black |
| Connectors | Gold-Plated Push Terminals | Gold-Plated Push Terminals |
| Dimensions (WxHxD) | 39" x 3.92" x 3" | 49.5" x 3.92" x 3" |
| Sold as | Each | Each |
| Weight | 11.5 lbs | 13.2 lbs |
| Crossover Frequency | 2.3 kHz | 2.3 kHz |
| Speaker Grille | Fixed Metal | Fixed Metal |
| Nominal Impedance | 8 Ohm | 8 Ohm |
| Power Peak | 225W | 225W |
| Power RMS | 90W | 90W |
| Sensitivity | 90 dB | 90 dB |
| Tweeter | 1" Pure Titanium Dome | 1" Pure Titanium Dome |
| Voice Coil | High Temp Voice Coil | High Temp Voice Coil |
| Woofer | Per Channel- 2 x 3" Titanium Vapor Deposit Polypropylene Cone | Per Channel- 2 x 3" Titanium Vapor Deposit Polypropylene Cone |
| Passive Radiator | 2 x Titanium Vapor Deposit Polypropylene Cone | 3 x Titanium Vapor Deposit Polypropylene Cone |

TROUBLESHOOTING

These speakers are designed to function trouble-free. Most problems that occur are due to simple issues. If having trouble, contact Technical Support at 866-838-5052.

WARRANTY

Limited Lifetime Warranty

SunBriteTV Sound bar Speakers have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to a designated service center with prior notification and an assigned return authorization number (RA).

CONTACTING TECHNICAL SUPPORT

As a thank you for purchasing SunBriteTV Electronics products, direct technical support services are available via phone. We encourage you to use this resource for any questions or concerns about our products. Visit our website for more support documentation.

866 838-5052

SunBriteTV.com

Copyright ©2025, Snap One, LLC. All rights reserved. Snap One and its respective logos are registered trademarks or trademarks of Snap One, LLC (formerly known as Wirepath Home Systems, LLC), in the United States and/or other countries. SunBriteTV is also a registered trademarks of Snap One, LLC. Other names and brands may be claimed as the property of their respective owners. Snap One makes no claim that the information contained herein covers all installation scenarios and contingencies, or product use risks. Information within this specification subject to change without notice.

200-01198
Rev 08262025mk