

A Versatile Mini-Bullet

Visualint™ 2MP IP Mini Bullet Outdoor Camera with Starlight

Designed for both indoor and outdoor applications, this 2MP mini bullet camera features Visualint's premium Starlight low-light color sensor so you can see clearly in the dark. Constructed using glass lenses and heavy-duty metal housing, it's IP66 rated for weatherproof outdoor performance.



VI-3000-BUL-S-WH

Key Features



Embedded Intelligent Analytics



Professional Video Monitoring




Enhanced Control & Integration


Without Starlight



With Starlight

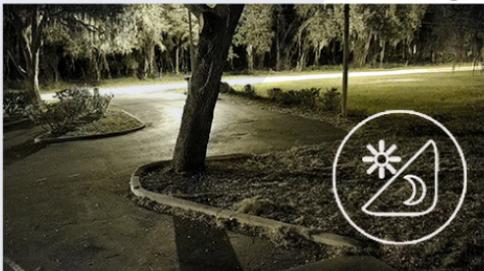

Starlight Low-Light Color Sensor

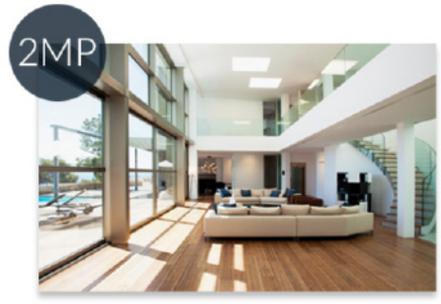

Widescreen & High Definition

Product Specs

Technical Specs & Features	VI-3000-BUL-S-WH
Audio Inputs / Outputs	1-ch / None
Image Sensor	2MP 1/2.8" Starlight CMOS
Maximum Record Resolution	1920 × 1080
Lens	2.8mm, F1.4
Est. Horizontal Viewing Angle	113.5°
Minimum Illumination	Color: 0.002Lux (F1.2,AGC ON) Black&White: 0.001Lux (F1.2,AGC ON) 0 Lux with IR
IR Range	49 ft
Remote Monitoring Integration	Immix
Recording Trigger	No
Full Screen Monitoring	Yes
Image Snapshot	Yes
Audio Support	1-ch, G.711A/G.711U/ADPCM/AAC
Triggered Action Desc.	Email, HTTP Notification, FTP
SD Card Support	N/A
Network / Ethernet Desc.	10M/100M Ethernet Interface
Supported Network Protocols	TCP, UDP, HTTP, MULTICAST, UPnP, DHCP, PPPoE, DDNS, NFS, FTP, NTP, RTP, RTSP, IPv6, SNMP, SMTP
Power Consumption	DC12 V, PoE (802.3af) 2W (IR OFF) 4W (IR ON)
Color	White
Dimensions (W x H x D)	2.6" x 2.6" x 6.7"
Weather Rating	IP66
Certifications	CE, FCC
Operating Temperature	-20-140°F, 0~95% RHG
Weight	0.9 lb

IP66 Outdoor Rating



Multiple Video and Snapshot Streams

