

Technical Bulletin

Connect Your Visualint VI-7000 to a Luma x10 NVR



The Visualint VI-7000 PTZ camera can be used with existing Luma x10 NVRs.

Advantages:

- The Luma x10 NVR has Visualint protocol, which allows for smart events
- Image Settings are available in the x10 NVR
- OSD Settings are available in the x10 NVR

Disadvantages:

- Privacy Mask is not available
- Rules cannot be set up in the x10 NVR
- Requires Internet Explorer

Procedure

Set the Protocol


Set the PTZ camera's Protocol to VISUALINT and set the Management Port to 80.

The screenshot shows the LUMA NVR configuration interface. The main window displays a table of IP cameras. A modal window titled "IP Camera" is open, allowing for the configuration of a specific camera. The fields in the modal are as follows:

Field	Value
IP Camera Address	192.168.69.86
Protocol	VISUALINT
Management Port	80
Channel No.	1
Camera Name	VM 7000
User Name	admin
Password	*****
Confirm	*****
Transfer Protocol	Auto
Adding Method	Manual
PoE Power	ON
PoE Over Drive Status	OFF

Image, OSD, and Privacy Mask Settings


The Display and OSD Settings can be edited via the Luma x10 NVR.

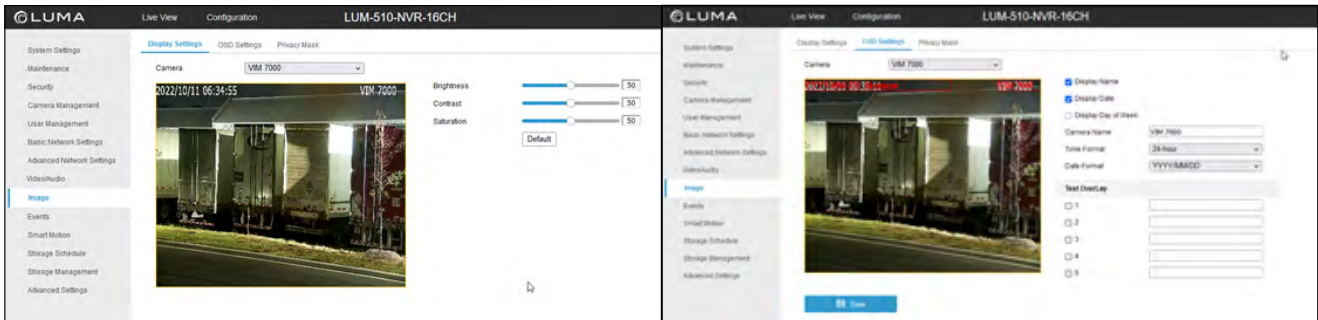

Alert: The Privacy Mask is not available when used with an x10 NVR


Motion Settings

Motion settings set up is as normal for the Luma x10 NVR.

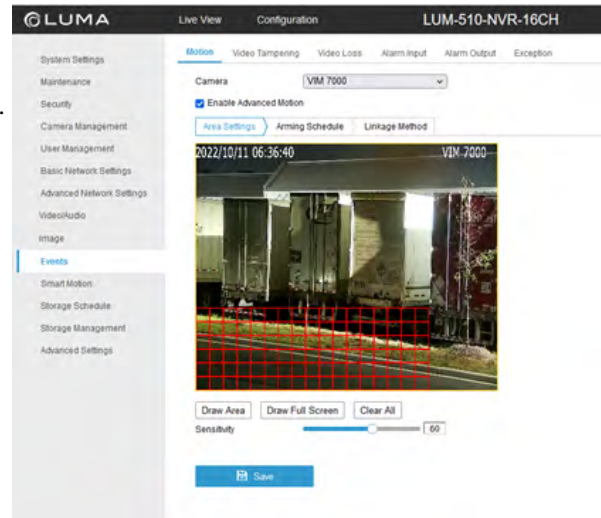

Set Up Events in the x10 NVR


Under Smart Motion, click the Enable checkbox and set the schedule per the NVR manual. Go to the Linkage Method tab, click the Enable checkbox and set the linkage desired.

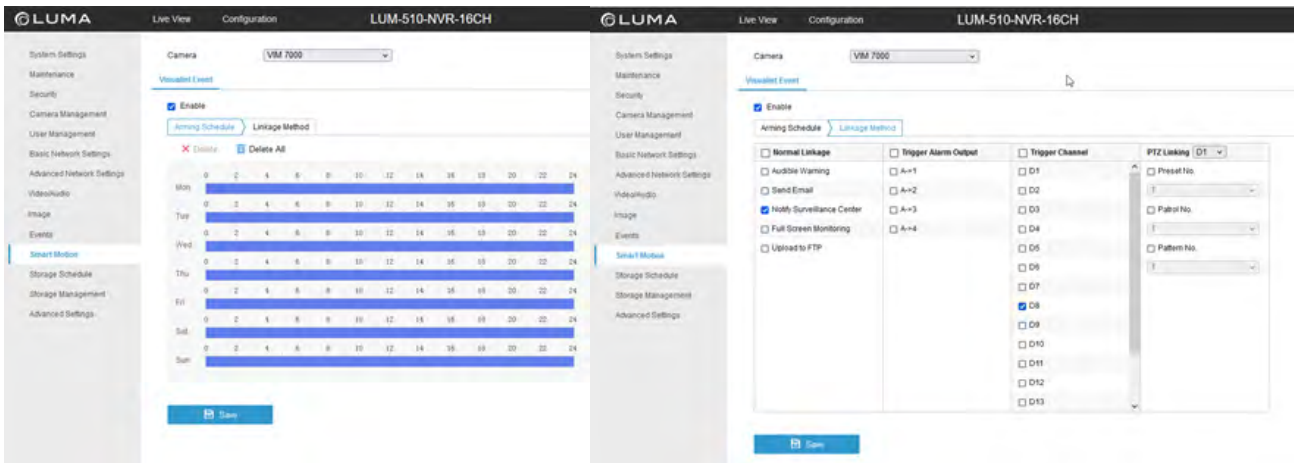

Set Up Events in the VI-7000

Under VCA > Scene Set, draw the VCA Rule and check the Valid box.

Under VCA > VCA Schedule, check Arming Enabled. Set the schedule. Set Link Type to Visualint Event.

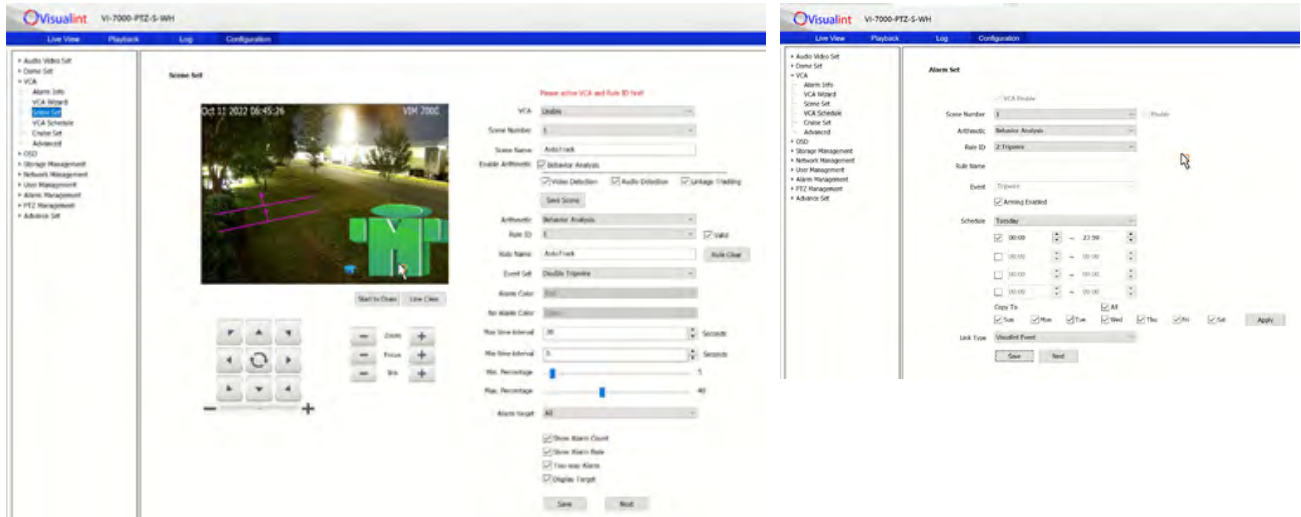

Technical Support

For chat and telephone, visit ctrl4.co/techsupport • Email: TechSupport@SnapOne.com
Visit tech.control4.com/technician for discussions, instructional videos, news, and more.

Warranty and Legal Notices

Find details of the product's Limited Warranty and other resources such as regulatory notices and patent and safety information, at snapone.com/legal or request a paper copy from Customer Service at 866.424.4489.

Copyright ©2022, Snap One, LLC. All rights reserved. Snap One and its respective logos are [registered trademarks](#) or trademarks of Snap One, LLC, in the United States and/or other countries. Control4 and Luma are also registered trademarks or trademarks of Snap One, LLC. Other names and brands may be claimed as the property of their respective owners. Snap One makes no claim that the information contained herein covers all installation scenarios and contingencies, or product use risks. Information within this specification subject to change without notice.

221201-0750

Part # 200-00914