

# SONANCE

## PATIO SERIES OUTDOOR AUDIO SYSTEM

4 SATELLITES | 4 GROUND STAKES | 1 SUBWOOFER

OPTIONAL: 1 SR 2-125 AMPLIFIER



**Patio Series 4.1 System w/SR2-125 Amplifier**  
SKU 93430

**Patio Series 4.1 System (no amp)**  
SKU 93429

### AESTHETICS

- Non-corroding, high heat ABS sealed enclosure

### PERFORMANCE

- 8 Ohms impedance matched system
- 8" dual voice coil subwoofer
- Perfectly even coverage for comfortable listening in areas up to 1,000 sq. ft. (~100m<sup>2</sup>) (depending on property layout)

### INSTALLATION

- Includes Sonance 9" ground stakes
- Compatible with Sonance 19" ground stakes
- Complete 4.1 System configuration on a single two-channel amplifier
- Expandable for up to 8.2 configuration

# SONANCE PATIO SERIES



## DIMENSIONS

### PATIO SAT

Diameter:	4.50" (115mm)
Height:	15.17" (385mm)
Depth:	7.20" (184mm)

### PATIO SUB

Canopy Width:	12.40" (315mm)
Enclosure Width:	9.84" (250mm)
Canopy Height:	6.20" (157.5mm)
Enclosure Height:	15.20" (386.2mm)
Overall Height:	21.41" (543.7mm)

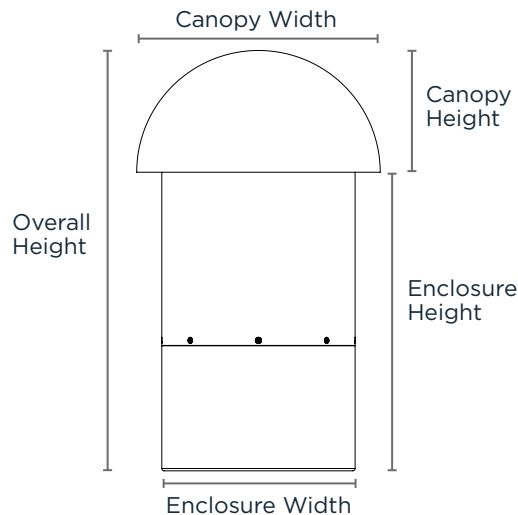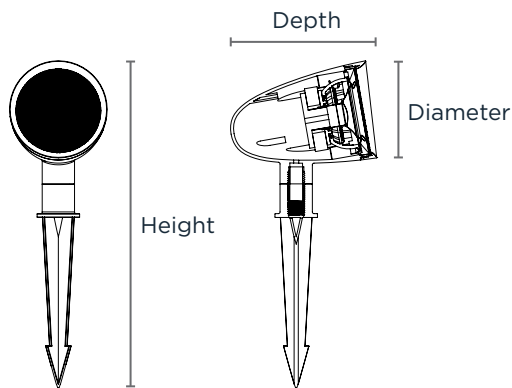

## SPECIFICATIONS

### Driver:

### Frequency Response:

### Crossover Frequency:

### Impedance:

### System Impedance:

### Power Handling:

### Sensitivity:

### Enclosure Material:

### Mounting Threads:

### Dimensions (L x Dia.):

### Shipping Weight:

### PATIO SATELLITE SPEAKER

3.5" (98mm) Anodized aluminum cone & Santoprene™ surround  
40Hz - 20kHz +/-3dB (System)  
125Hz  
16 Ohms nominal  
8 Ohms nominal  
50 watts minimum; 150 watts maximum  
85dB 2.83V / 1 meter  
High-heat ABS sealed enclosure, Non-corroding  
1/2" NPS (National Pipe Straight) 6.75" x 4.5" (171.35mm x 115mm)  
68 lbs (31kg) System

### PATIO SUBWOOFER

8" (203mm) dual voice coil, polypropylene & Santoprene surround  
40Hz - 20kHz +/-3dB (System)  
100Hz  
8 Ohms nominal per voice coil  
8 Ohms nominal  
150 Watts  
89dB Sensitivity @ 2.83V / 1 meter  
High-heat ABS sealed enclosure, Non-corroding  
-  
21.4" x 12.4" (544mm x 315mm)  
68 lbs (31kg) System

### SR 2-125 AMPLIFIER

### Power Output (RMS):

### Dimensions w/ feet (WxHxD):

### Rack Space Requirement:

125 watts (2-channels driven at 8 Ohms)  
8.625" x 2.125" x 16.8125"  
(219mm x 54mm x 427mm)  
1U-Half Rack width

### LIMITED THREE (3) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will, at its option and expense, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. Please visit our website and owner's e-Manual for complete warranty and exclusion information.

### SONOS AMPLIFIER LIMITED ONE (1) YEAR WARRANTY

Please visit: [sonos.com/en-us/legal/terms#warranty](https://sonos.com/en-us/legal/terms#warranty) for complete warranty information.

©2020 Sonance. All rights reserved. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website: [sonance.com](https://sonance.com)