



ClareOne Glass Break Detector

CLR-C1-GB

Intrusion




The ClareOne Glass Break Detector detects the shock and sound of breaking glass and sends an alert to the ClareOne Panel. The detector provides a 20 ft. maximum detection range, and can sense sound in a 360° pattern when mounted on a ceiling.

Specifications

Compatible panel	ClareOne (CLR-C1-PNL1)
Transmitter frequency	433 MHz
Encrypted	Yes
Transmitted indications	Alarm, Tamper, Low Battery
Supervisory keep-alive	60-70 minutes
Maximum detection range	20 ft
Minimum detection range	5 ft
Glass thickness	Plate glass at 3mm thickness
Microphone	Omni-directional with 360° coverage pattern
Battery type	(2x) 3VDC Lithium Battery, CR123A
Battery life	Up to 8 years
Operating temperature	14° F to 122° F (-10° C to 50° C)
Storage temperature	-30° F to 140° F (-34° C to 60° C)
Relative humidity	95% non-condensing
Dimensions (W x H x D)	3.9 x 2.75 x 1.5 in. (99.06 x 69.85 x 38.1 mm)

Performance Highlights:

- 20 ft radius range and 360° coverage pattern
- Includes two replaceable extra long-life lithium batteries
- Tamper protected
- Encrypted technology prevents detector takeovers
- Pairs easily and quickly with the ClareOne panel

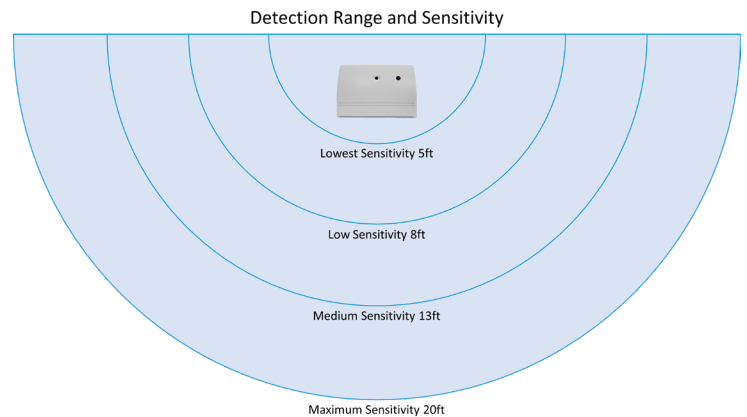

By making technology simple, Clare provides exclusive benefits to integrators, builders, and end users. We offer innovative smart home and business solutions, wireless security, controllable lighting, and IP CCTV components. For more information, visit www.clarecontrols.com.