

ALSD2

Siren Driver

Altronix ALSD2 is a high output, very low current draw dual channel siren driver. It is designed to work with alarm panels with limited current capability.



ALSD2

Specifications

Input

Voltage	6VDC or 12VDC operation
Current Draw	Ranges from 0.3A to 1.22A, depending on speaker impedance and supply voltage

Operation


Two (2) channel operation - steady or yelp
Parallel or series speaker wiring
103 dB/10'/6V - 8 Ohms
105 dB/10'/6V - 4 Ohms
106 dB/10'/12V - 8 Ohms
111 dB/10'/12V - 4 Ohms

Physical and Environmental

Dimensions (L x W x H)	2.75" x 1.8" x 1.1" (69.85mm x 45.7mm x 27.9mm)
Product Weight	0.12 lb. (0.05 kg)
Shipping Weight	0.15 lb. (0.07 kg)
Temperature	
Operating	-25°C to 55°C (-13°F to 131°F)
Storage	-25°C to 70°C (-13°F to 158°F)
Relative Humidity	85% +/-5%
Mounting hardware included	

Board Dimensions (L x W x H) and Drawing

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

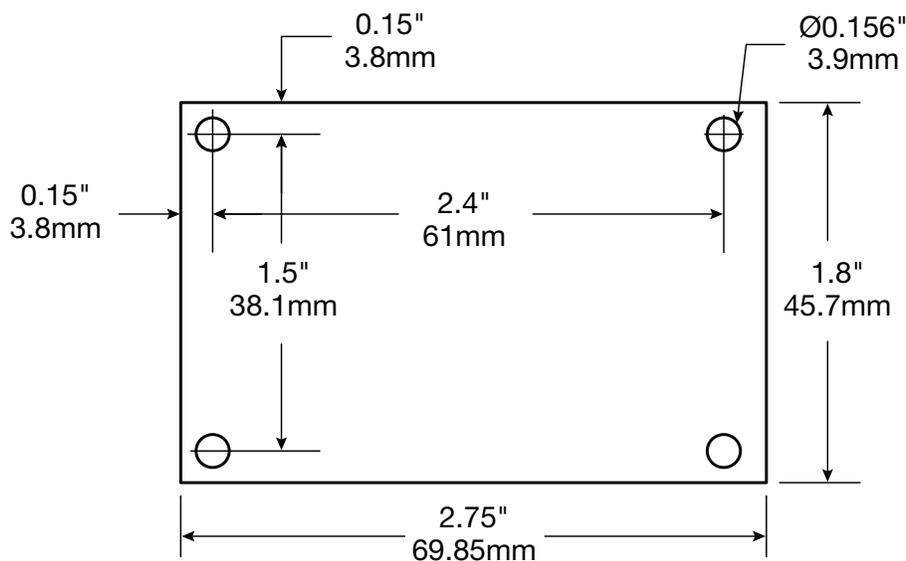

Lifetime Warranty