



Pendant Mount
Surveillance Accessory

Installation Manual



Installation

Before you start, ensure that the hardware is in good condition and all assembly parts are included.

Check that the mounting surface is strong enough to withstand three times the weight of the mount and camera.

If installing on a cement surface, use the included expansion anchors to install the mount. If installing on a wood surface, use self-tapping wood screws (not included) to secure the mount.

Take care that all equipment is powered off during installation.

Important Note: To avoid damaging the surface of your dome camera during installation, keep it away from walls and other objects. Do not remove the protective coating from the dome until after the camera is installed and the dome is in place.

If the product does not assemble properly, please contact technical support.

Compatibility

This unit is intended primarily to be used with Luma Surveillance cap mounts. Together, these allow you to install dome cameras from the ceiling to hang below any duct work or other objects that obscure the field of vision.

The extenders in this product can also be used in conjunction with the Luma arm mount. The pendant base is not used when using extenders with an arm mount.


Box Contents

Before installing, familiarize yourself with the parts of your mount.

- Base
- 2 extenders
- 4 wall anchors
- 4 locking screws

Other Required Equipment

- Dome camera with attached cap mount
- Precision flathead screwdriver
- 1/2" socket wrench

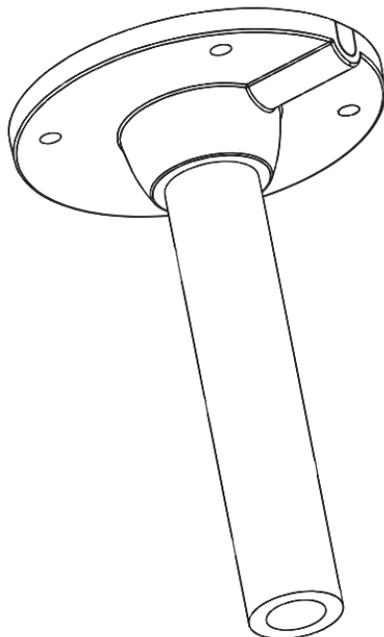


Prepare for Installation

Using the base as a template, mark the locations of the four holes. Drill pilot holes for your anchor bolts, as well as a cable hole if desired.

Attach your camera to the dome cap according to the instructions supplied with the cap.

If you will be running the wiring through the base of the mount to the cable hole, no further changes are needed.

If you will be running the wiring through the conduit on the side of the base, remove the gasket from the base, trim away the tongue that fills the conduit, and replace the gasket.

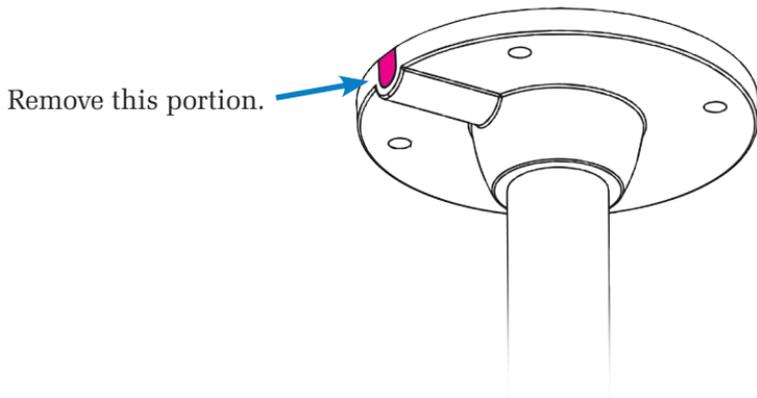

Install the Pendant

Thread the wires from your surveillance system through the base.

Secure the base to the ceiling.

Thread the wires through the first extender, then screw the extender into place. Once it is tightly seated, use a locking screw to secure the attachment. Repeat this step for each extender required.

Connect the wiring from the extender to the wiring from the camera / dome cap assembly.

Once everything is connected, screw the camera / dome cap assembly onto the extender. Once it is tightly seated, use a locking screw to secure the attachment.

You can now power up your camera and finish installation using the instructions in its manual.

Weatherproofing

While the gasket provided helps block moisture, we recommend you run a silicone bead between the base and the installation surface. If the wiring will be exposed, also run a bead around the place where the wire enters the pendant mount base.

The extenders are engineered to prevent moisture from entering, however you can seal the seams to be extra safe.

Support

If you need help, email support@SnapAV.com. For information, instructional videos, support documentation, or ideas, visit our website.

5-Year Limited Warranty

This Luma Surveillance™ product has a 5-Year Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products that have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to a designated service center with an assigned return authorization (RA) number. Contact technical support for an RA number.

Copyright ©2015 Luma Surveillance. All rights reserved.

Version 150930-0858

