

9 Port Gigabit PoE Switch

8 Port PoE + 1 Port Uplink

0E-9P8POEGIG



PRODUCT DESCRIPTION

The 9 Port Gigabit PoE Switch is fully integrated to support security monitoring, providing high-performance packet forwarding and gigabit Ethernet transfer rates. Adaptive ports use the appropriate bandwidth to ensure clear images and smooth transmission for any application, including high definition video recording or streaming.

FEATURES

- **9 adaptive gigabit Ethernet ports:**
 - 8 x PoE ports (RJ45)
 - 1 x Uplink port (RJ45)
- **Quick setup, with plug and play**
- **18 Gbps switching capacity**
- **130W PoE budget**
- **Port status LED indicator**
- **Power adapter included**
- **Energy efficient**
- **Standard: 802.3/802.3u/802.3ab/802.3af/at compliant**
- **Limited Lifetime Warranty**



SPECIFICATIONS

PART #	0E-9P8POEGIG
UPC	840049300835
INPUT POWER	100-240 VAC
TRANSMISSION DISTANCE	328 ft. (100m)
MAC ADDRESS TABLE	4K
SWITCHING CAPACITY	18 Gbps
DIMENSIONS (L x W x H)	7" x 4.2" x 1.1" (175 x 107 x 28mm)
WEIGHT	2.53 lbs. (1.15kg)



Commutateur PoE Gigabit à 9 ports

8 ports PoE + 1 port Uplink

0E-9P8POEGIG

UltraTech
POWER PRODUCTS

DESCRIPTION DU PRODUIT

Le commutateur PoE Gigabit à 9 ports permet une surveillance de la sécurité intégrée. Il offre une transmission de paquets à haute performance et une vitesse de transfert Gigabit rapide. Les ports actifs utilisent la bande passante appropriée pour des images limpides et une transmission efficace, peu importe l'application, y compris l'enregistrement et la diffusion vidéo haute définition.

CARACTÉRISTIQUES

- **9 ports Ethernet Gigabit adaptatifs**
 - 8 ports PoE (RJ45)
 - 1 port Uplink (RJ45)
- Configuration facile prête à l'emploi
- Capacité de commutation de 18 Go/s
- Puissance PoE totale de 130 W
- Indicateur à DEL d'état des ports
- Adaptateur inclus
- Efficacité énergétique
- Normes : Conformité 802.3/802.3u/802.3ab/802.3af/802.3at
- Garantie à vie limitée



SPÉCIFICATIONS

NO DE PIÈCE	0E-9P8POEGIG
CUP	840049300835
PUISSANCE D'ENTRÉE	100 à 240 VCA
DISTANCE DE TRANSMISSION	328 pi (100 m)
TABLE D'ADRESSES MAC	4K
CAPACITÉ DE COMMUTATION	18 Go/s
DIMENSIONS (L x l x H)	7 x 4,2 x 1,1 po (175 x 107 x 28 mm)
POIDS	2,53 lb (1,15 kg)



9 Port Gigabit PoE Switch


8 Port PoE + 1 Port Uplink

ADDITIONAL SPECIFICATIONS


POWER	Power Supply		External power supply
	Voltage Range		52 VDC
	PoE Power Budget		130W for PoE
ETHERNET	Speed		Ports 1 to 9: 10/100/1000 Mbps
	Transmission Distance		Ports 1 to 9: 328 ft. (100m)
NETWORK SWITCH	Ethernet Standard		IEEE 802.3/802.3u/802.3ab/802.3af/at
	Switching Capacity		18 Gbps
	Transfer Rate		14,880 pps for 10 Mbps 148,800 pps for 100 Mbps 1,488,000 pps for 1000 Mbps
	MAC Address Table		4K MAC
LINK/ACT INDICATOR	On	Green	Port connecting
	Blinks	-	Port receiving or transmitting data
	Off	-	Port is not successfully linked to device
PoE	On	Green	PD is connected
	Off	-	No PD is connected or power forwarding failed
	PoE PIN assignment		V+(RJ45 Pin 1,2), V-(RJ45 Pin 3, 6)
WORKING ENVIRONMENT	Working Temperature		0 ~ 40°C (32 ~ 104°F)
	Storage Temperature		-40 ~ 70°C (-40 ~ 158°F)
	Humidity Non-Condensing		0 ~ 85%
MECHANICAL	Dimensions (L x W x H)		7" x 4.2" x 1.1" (175 x 107 x 28mm)
	Color		Black

PHYSICAL INTERFACE

Front



Back

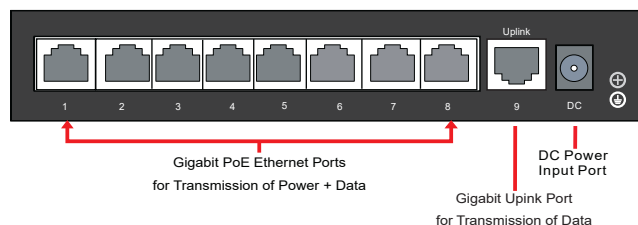

FOR MORE INFORMATION, CONTACT TECH SUPPORT: 1.833.574.9124