



ClareVue In-Wall Accessory Switch-Dimmer

CVL-IWA-10




Specifications	
General	
Rating	120 VAC, 60 Hz
Terminations	Requires neutral, traveler, and ground
Max Traveler Wire Range	Maximum traveler wire distance: 400 ft. Interconnected between 4 Add-on switches -No more than 100 ft between each switch -Maximum traveler wire distance between primary and (1) Add-on Switch: 250 ft
Operating Temperature	-32 to 104° F (-0° to 40° C)
Usage	Indoor only
Code Compliance	cUL Listed Complies with FCC and Industry Canada Regulations

The ClareVue In-Wall Accessory Switch-Dimmer allows for remote wireless ON/OFF, and dimmer control of the In-Wall Switch (CVL-IWS-10) and In-Wall Dimmer (CVL-IWD-10). This Accessory Add-On can be installed with no new wiring, fits into standard wall boxes, and use the standard 3-way 120VAC 60Hz wiring (requires neutral wire).

IMPORTANT NOTE: This ClareVue In-Wall Accessory Switch-Dimmer DOES NOT work with old ClareVue Master and Accessory Neutral Switches and Dimmers.

- Remote and manual ON/OFF, and dimming control
- Add-on accessory for use with In-Wall Switch or Dimmer
- May be used with up to 4 additional accessory dimmers
- Works with existing ClareVue 1, 2, and 3-gang cover plates
- Requires neutral wire
- This add-on accessory only works with CVL-IWS-10 switch and CVL-IWD-10 dimmer

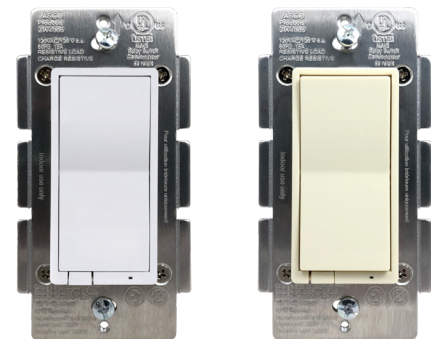

*Includes white and light almond color paddles.

By making home technology simple, Clare provides exclusive benefits to integrators, builders, and homeowners. We offer innovative home automation solutions, Class D amplifiers, media distribution, controllable lighting, and IP CCTV components. For more information, visit clarecontrols.com.