


14/2 RISER RATED, UNSHIELDED FIRE ALARM CABLE



14 AWG 2 SOLID CONDUCTORS

Ratings FPLR, CL3R, FT4
Approvals UL Listed

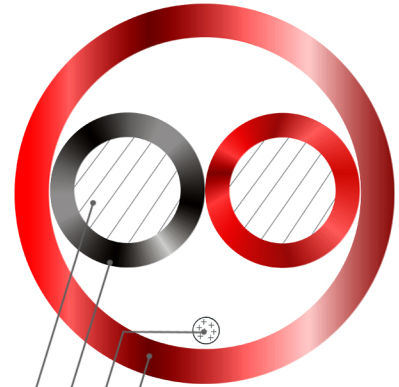

Construction

Conductor 14 AWG Solid Bare Copper
Conductor Count 2
Insulation Riser PVC (0.011" nom.)
Insulation Colors Black, Red
Lay Length 5.25" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.015" nom.)
Overall Diameter 0.196" nom.

Print Legend

ADI PRO P/N XXXX 2Cx14AWG
OXYGEN FREE SOL UNSHIELDED
E542774 (UL) FPLR 75C or E535998 (UL) CL3R
75C 2Cx14AWG FT4 RoHS LOT#XXXX MMDDYY XXXXFT

Center Conductor
Insulation
Rip cord
Jacket

Properties

Operating Voltage 300 Volts max.
DC Resistance 2.57 Ohms/1000' at 20°C
Capacitance 17.4 pF/ft.nom.
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2002106	Red	1000 ft.	Wood Reel



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands