
22/4 RISER RATED, UNSHIELDED FIRE ALARM CABLE

22 AWG 4 SOLID CONDUCTORS

Ratings	FPLR, CL3R, FT4
Approvals	UL Listed

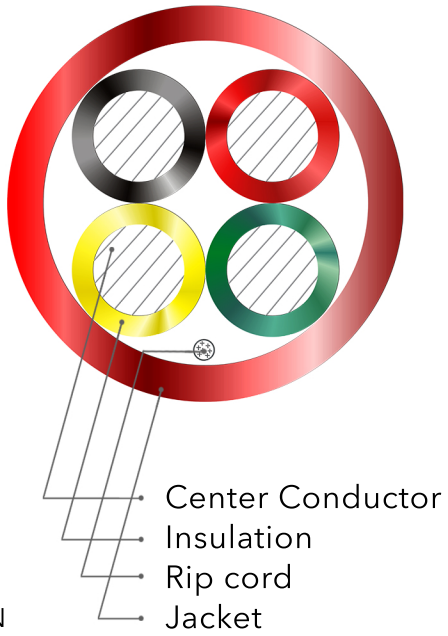

Construction

Conductor	22 AWG Solid Bare Copper
Conductor Count	4
Insulation	Riser PVC (0.011" nom.)
Insulation Colors	Black, Red, Green, Yellow
Lay Length	Straight
Shielding	N/A
Rip Cord	Yes
Jacket	PVC (0.016" nom.)
Overall Diameter	0.123" nom.
Print Legend	ADI PRO P/N XXXX 4Cx22AWG OXYGEN FREE SOL UNSHIELDED E542774 (UL) FPLR 75C or E535998 (UL) CL3R 75C 4Cx22AWG FT4 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	18 Ohms/1000'at 20°C
Capacitance	18.2 pF/ft.nom.
Temperature	Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.
Flame Rating	UL1666 (Riser); CSA C22.2 No. 2556 (FT4)
RoHS Compliant	Yes
Country of Origin	China

PART#	COLOR	LENGTH	BOX
RN-2012506	Red	500 ft.	Speed Coil

UL LISTED

RoHS COMPLIANT

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands