

# 18/4 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE



## 18 AWG 4 SOLID CONDUCTORS


Ratings FPLP, CL3P, FT6  
Approvals UL Listed

### Construction

Conductor 18 AWG Solid Bare Copper  
Conductor Count 4  
Insulation Plenum PVC (0.007" nom.)  
Insulation Colors Black, Red, Green, Yellow  
Lay Length 4.50" nom.  
Shielding N/A  
Rip Cord Yes  
Jacket Plenum PVC (0.015" nom.)  
Overall Diameter 0.157" nom.

### Print Legend

ADI PRO P/N XXXX 4Cx18AWG OXYGEN  
FREE SOL UNSHIELDED E542774 (UL)  
FPLP 75C or E535998 (UL) CL3P 75C 4Cx18AWG  
FT6 RoHS LOT#XXXX MMDDYY XXXXFT

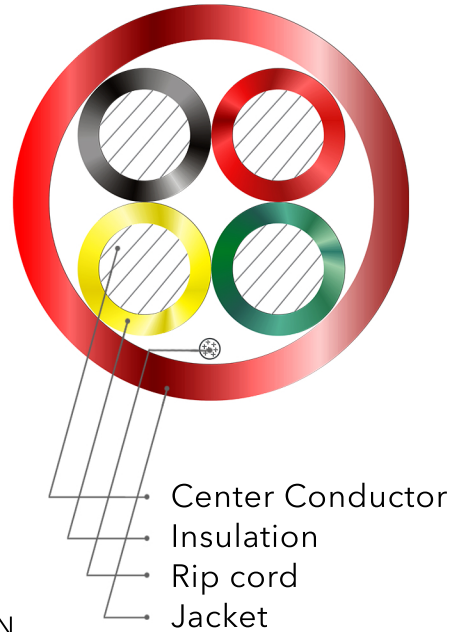

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 6.52 Ohms/1000' at 20°C  
Capacitance 25.6 pF/ft. nom.  
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.  
Flame Rating NFPA 262(Plenum);  
CSA C22.2 No. 2556 (FT6)  
RoHS Compliant Yes  
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2004106	Red	1000 ft.	Express Box
RN-2004506	Red	500 ft.	Express Box



For more information contact  
your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)