

18/2 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE

ADI PRO

18 AWG 2 SOLID CONDUCTORS


Ratings FPLP, CL3P, FT6
Approvals UL Listed

Construction

Conductor 18 AWG Solid Bare Copper
Conductor Count 2
Insulation Plenum PVC (0.007" nom.)
Insulation Colors Black, Red
Lay Length 2.25" nom.
Shielding N/A
Rip Cord Yes
Jacket Plenum PVC (0.015"nom.)
Overall Diameter 0.136" nom.

Print Legend

ADI PRO P/N XXXX 2Cx18AWG OXYGEN
FREE SOL UNSHIELDED E542774 (UL)
FPLP 75C or E535998 (UL) CL3P 75C 2Cx18AWG
FT6 RoHS LOT#XXXX MMDDYY XXXXFT

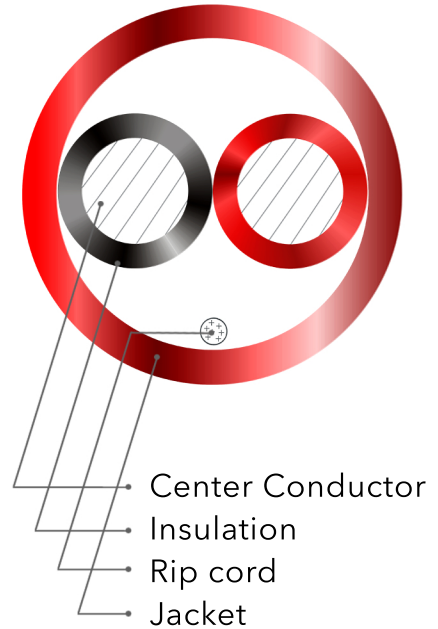

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.52 Ohms/1000' at 20°C
Capacitance 25.6 pF/ft.nom.
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.
Flame Rating NFPA 262 (Plenum);
CSA C22.2 No. 2556 (FT6)
RoHS Compliant Yes
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2005106	Red	1000 ft.	Express Box
RN-2005506	Red	500 ft.	Express Box



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands