

# 18/2 RISER RATED, UNSHIELDED FIRE ALARM CABLE

# ADI PRO


## 18 AWG 2 SOLID CONDUCTORS

Ratings FPLR, CL3R, FT4  
Approvals UL Listed

### Construction

Conductor 18 AWG Solid Bare Copper  
Conductor Count 2  
Insulation Riser PVC (0.011" nom.)  
Insulation Colors Black, Red  
Lay Length 2.00" nom.  
Shielding N/A  
Rip Cord Yes  
Jacket PVC (0.015" nom.)  
Overall Diameter 0.144" nom.

Print Legend ADI PRO P/N XXXX 2Cx18AWG OXYGEN  
FREE SOL UNSHIELDED E542774 (UL)  
FPLR 75C or E535998 (UL) CL3R 75C 2Cx18AWG  
FT4 RoHS LOT#XXXX MMDDYY XXXXFT

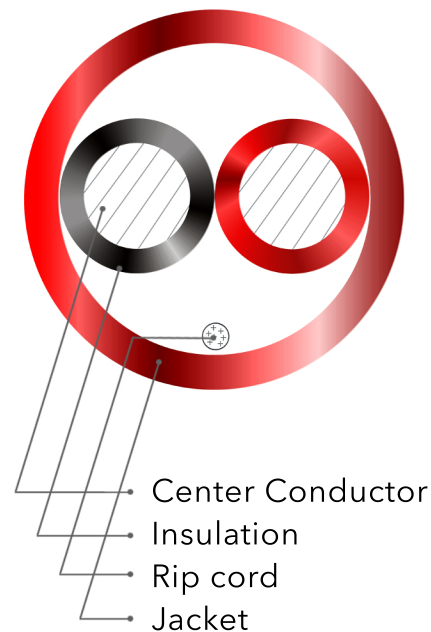

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 6.52 Ohms/1000' at 20°C  
Capacitance 19.6 pF/ft. nom.  
Temperature Wire maintains flexibility  
between -20°C/-4°F to  
75°C/167°F. Exposure  
below 0°C/32°F may cause  
PVC jacket to be brittle or  
crack if impacted or bent.  
Flame Rating UL 1666 (Riser);  
CSA C22.2 No. 2556 (FT4)  
RoHS Compliant Yes  
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2006106	Red	1000 ft.	Express Box
RN-2006506	Red	500 ft.	Express Box



For more information contact  
your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)