

18/4 RISER RATED, UNSHIELDED FIRE ALARM CABLE



18 AWG 4 SOLID CONDUCTORS

Ratings
Approvals


FPLR, CL3R, FT4
UL Listed

Construction

Conductor 18 AWG Solid Bare Copper
Conductor Count 4
Insulation Riser PVC (0.011" nom.)
Insulation Colors Black, Red, Green, Yellow
Lay Length 6.00" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.015" nom.)
Overall Diameter 0.159" nom.

Print Legend

ADI PRO P/N XXXX 4Cx18AWG OXYGEN
FREE SOL UNSHIELDED E542774 (UL)
FPLR 75C or E535998 (UL) CL3R 75C 4Cx18AWG
FT4 RoHS LOT#XXXX MMDDYY XXXXFT

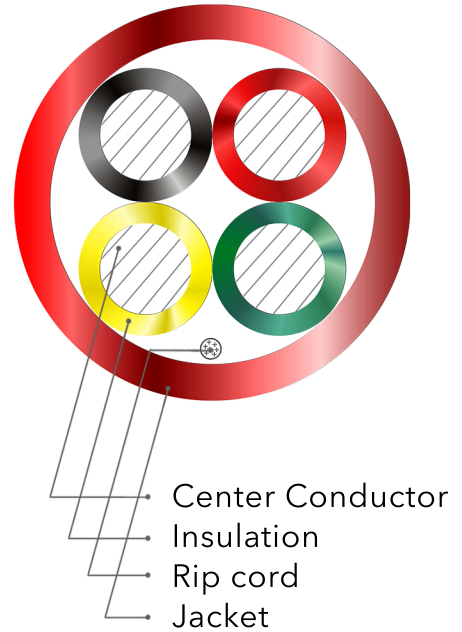

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.52 Ohms/1000' at 20°C
Capacitance 19.6 pF/ft. nom.
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.
Flame Rating UL1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2008106	Red	1000 ft.	Express Box
RN-2002506	Red	500 ft.	Express Box



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands