


# 14/2 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE



## 14 AWG 2 SOLID CONDUCTORS

Ratings FPLP, CL3P, FT6  
Approvals UL Listed

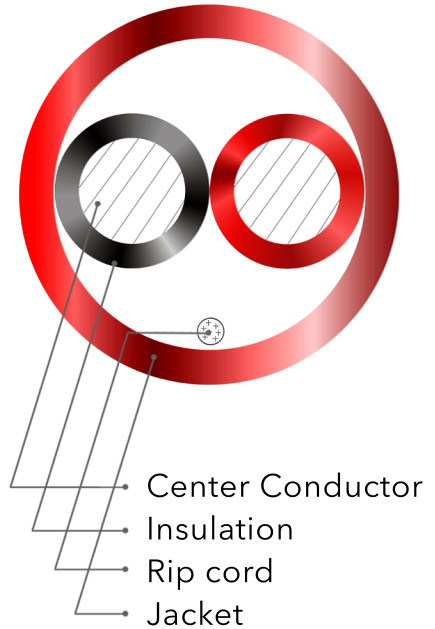

### Construction

Conductor 14 AWG Solid Bare Copper  
Conductor Count 2  
Insulation Plenum PVC (0.007" nom.)  
Insulation Colors Black, Red  
Lay Length 5.25" nom.  
Shielding N/A  
Rip Cord Yes  
Jacket Plenum PVC (0.015" nom.)  
Overall Diameter 0.206" nom.

### Print Legend

ADI PRO P/N XXXX 2Cx14AWG  
OXYGEN FREE SOL UNSHIELDED  
E542774 (UL) FPLP 75C or E535998 (UL) CL3P  
75C 2Cx14AWG FT6 RoHS LOT#XXXX MMDDYY XXXXFT

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 2.57 Ohms/1000' at 20°C  
Capacitance 22.2 pF/ft.nom.  
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.  
Flame Rating NFPA 262 (Plenum); CSA C22.2 No. 2556 (FT6)  
RoHS Compliant Yes  
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2001106	Red	1000 ft.	Wood Reel
RN-2003506	Red	500 ft.	Wood Reel



For more information contact  
your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)