

# 16/2 RISER RATED, UNSHIELDED FIRE ALARM CABLE

# ADI PRO

## 16 AWG 2 SOLID CONDUCTORS

Ratings  
Approvals


FPLR, CL3R, FT4  
UL Listed

### Construction

Conductor 16 AWG Solid Bare Copper  
Conductor Count 2  
Insulation Riser PVC (0.011" nom.)  
Insulation Colors Black, Red  
Lay Length 2" nom.  
Shielding N/A  
Rip Cord Yes  
Jacket PVC (0.017" nom.)  
Overall Diameter 0.162" nom.

Print Legend

ADI PRO P/N XXXX 2Cx16AWG OXYGEN  
FREE SOL UNSHIELDED E542774 (UL)  
FPLR 75C or E535998 (UL) CL3R 75C 2Cx16AWG  
FT4 RoHS LOT#XXXX MMDDYY XXXXFT

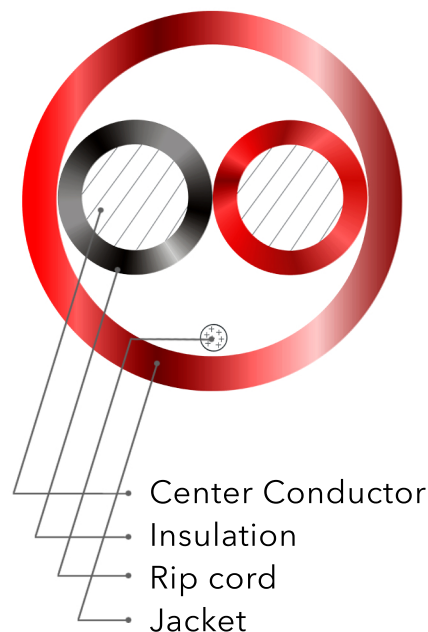

### Properties

Operating Voltage 300 Volts max.  
DC Resistance 4.1 Ohms/1000' at 20°C  
Capacitance 21.1 pF/ft.nom.  
Temperature Wire maintains flexibility  
between -20°C/-4°F to  
75°C/167°F. Exposure  
below 0°C/32°F may cause  
PVC jacket to be brittle or  
crack if impacted or bent.  
Flame Rating UL 1666 (Riser);  
CSA C22.2 No. 2556 (FT4)  
RoHS Compliant Yes  
Country of Origin China

| PART#      | COLOR | LENGTH   | BOX         |
|------------|-------|----------|-------------|
| RN-2015506 | Red   | 1000 ft. | Express Box |
| RN-2011506 | Red   | 500 ft.  | Express Box |



For more information contact  
your ADI Sales person or visit  
[adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)