


Speaker Cable

Direct burial 18 AWG 4C 42 Strands

Cross Section

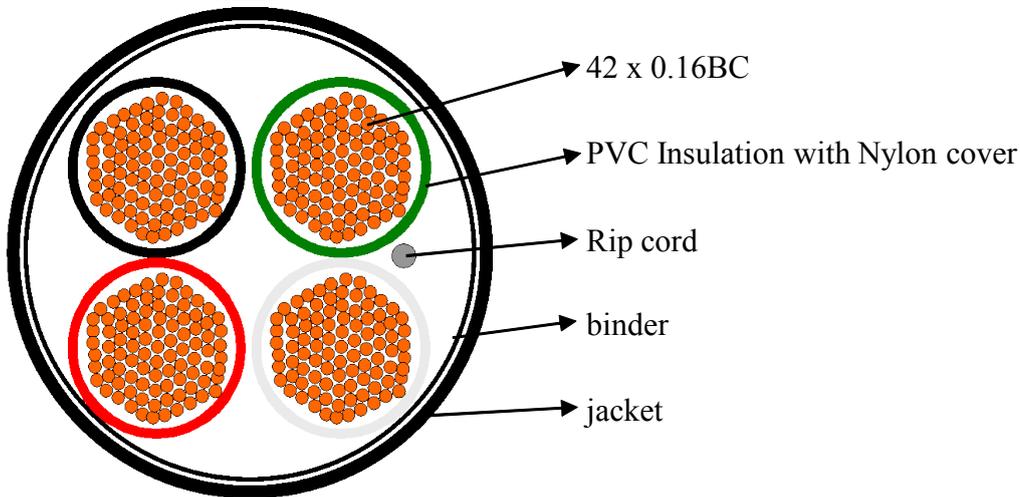

Application:

Multi-conductor-audio/sound, control & instrumentation cables, indoor/outdoor direct burial

Construction:

4 core	Oxygen Free Copper Wire Strands
AWG	18
Stranding (wire NO./wire dia. mm)	42/0.16

Insulation:

Material:	PVC
Thickness (mm):	0.25 +/-0.1
Insulation Diameter (mm):	1.8 +/- 0.2
Cover:	transparent flame resistant Nylon,
Thickness (mm):	0.20 +/- 0.1
Diameter	2.2 +/- 0.2

Binder over cores: 20% overlap

Ripcord: Nylon (150D)

Jacket:

Material:	PVC
Nominal Thickness (mm)	1.0 +/- 0.2
Cable Dia. (mm)	7.8 +/- 0.4

Electrical Performance

Operation Temperature (degree):	75
Voltage Rating (V):	300

Mechanical Characteristics

Test Object:	Jacket
test Material:	PVC
Cold Bend (-20+/-2 X4hrs)	No crack