


# RF DOOR/WINDOW SENSOR

## 345MHZ, EXTERNAL INPUT

**ADI**  
**PRO**

0E-DRWD345 is a surface mount wireless door/window sensor compatible with 2GIG and Honeywell panels and receivers. Its small, low-profile design and wireless range are ideal for most residential or light commercial applications.

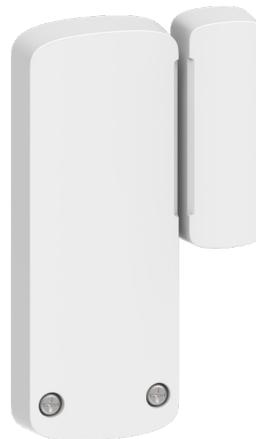

## FEATURES

Thin design, strong rare earth magnet, 0.625" gap

Snap-on interchangeable white/brown covers included

Proven reliable wireless technology

Compatible with 345MHz wireless protocol (2GIG and Honeywell)

5-8 year battery life, CR2032 replaceable lithium battery

FCC and IC approved

2-year warranty

## 0E-DRWD345

### Product Specifications

**PART#:** 0E-DRWD345

**UPC:** 840049313095

**Sensor Dimensions:** 2.25" x 1" x .25"  
(57.2 x 24.5 x 6.4mm)

**Magnet Dimensions:** 1.37" x .5" x .25"  
(34.8 x 12.7 x 6.4mm)

**Operating Temperature:** 32° to 120°F  
(0° to 49°C)

**Operating Humidity:** 5-95% RH  
non-condensing

**Compatibility:** 345MHz wireless protocol (encrypted formats excluded)

**FC** **IC**

For more information, contact your ADI salesperson or visit [adiglobal.com/adiexclusivebrands](http://adiglobal.com/adiexclusivebrands)