

14/2 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE



14 AWG 2 SOLID CONDUCTORS

Ratings
Approvals

FPLP, CL3P, FT6
ETL Listed


Construction

Conductor
Conductor Count
Insulation
Insulation Colors
Lay Length
Shielding
Rip Cord
Jacket
Overall Diameter

14 AWG Solid Bare Copper
2
Plenum PVC (0.007" nom.)
Black, Red
5.25" nom.
N/A
Yes
Plenum PVC (0.015" nom.)
0.206" nom.

Print Legend

ADI PRO P/N RN-200XXXX
OXYGEN FREE 2C14 3180662 (ETL)US
FPLP 75C ROHS CL3P FT6 LOT#XXXX
MMDDYY XXXXFT

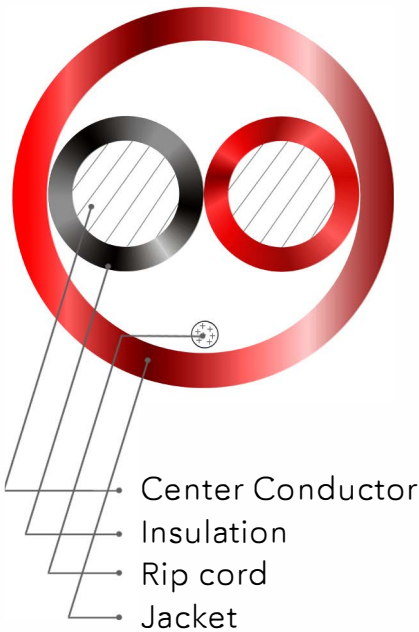

Properties

Operating Voltage
DC Resistance
Capacitance
Temperature

300 Volts max.
2.57 Ohms/1000' at 20°C
22.2 pF/ft.nom.
Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.

Flame Rating
RoHS Compliant
Country of Origin

NFPA 262 (Plenum);
CSA C22.2 No. 2556 (FT6)
Yes
China

PART#	COLOR	LENGTH	BOX
RN-2001106	Red	1000Ft.	Wood Reel
RN-2003506	Red	500Ft.	Wood Reel



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands