

14/2 RISER RATED, UNSHIELDED FIRE ALARM CABLE




14 AWG 2 SOLID CONDUCTORS

Ratings FPLR, CL3R, FT4
Approvals ETL Listed

Construction

Conductor 14 AWG Solid Bare Copper
Conductor Count 2
Insulation Riser PVC (0.011" nom.)
Insulation Colors Black, Red
Lay Length 5.25" nom.
Shielding N/A
Rip Cord Yes
Jacket PVC (0.015" nom.)
Overall Diameter 0.196" nom.

Print Legend ADI PRO P/N RN-200XXXX
OXYGEN FREE 2C14 3180662 (ETL)US
FPLR 75C ROHS CL3R FT4 LOT#XXXX
MMDDYY XXXXFT

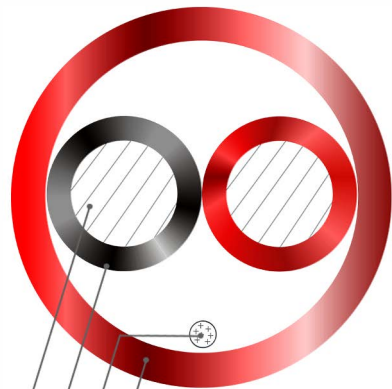

Center Conductor
Insulation
Rip cord
Jacket

Properties

Operating Voltage 300 Volts max.
DC Resistance 2.57 Ohms/1000' at 20°C
Capacitance 17.4 pF/ft.nom.
Temperature Wire maintains flexibility between -20°C/-4°F to 75°C/167°F. Exposure below 0°C/32°F may cause PVC jacket to be brittle or crack if impacted or bent.

Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin China

PART#	COLOR	LENGTH	BOX
RN-2002106	Red	1000Ft.	Wood Reel



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands