
18/6 RISER RATED, SHIELDED SECURITY & CONTROL CABLE

18 AWG 6 Stranded Conductors, Shielded

Ratings	CMR, CL3R, FT4
Approvals	ETL Listed

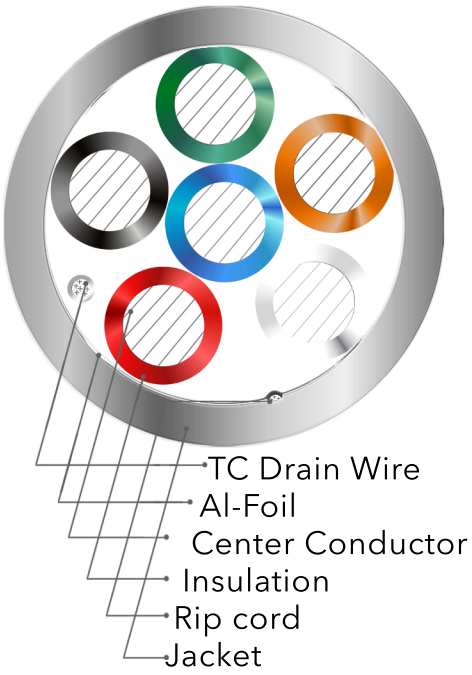

Construction

Conductor	18 AWG 19 Strand Bare Copper
Conductor Count	6
Insulation	PVC (0.011" nom.)
Insulation Colors	Black, Red, White, Green, Brown, Blue
Lay Length	3.60" nom.
Shielding	Aluminum Foil/Mylar w/ 24 AWG Tinned-Copper Drain
Rip Cord	Yes
Jacket	PVC (0.016" nom.)
Overall Diameter	0.214" nom.

Print Legend	ADI PRO P/N RN-XXXXXXX OXYGEN FREE 6C18 SHIELDED 3180662 C(ETL)US CL3R 75C, CMR FT4 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	6.66 Ohms/1000' at 20°C
Capacitance	22.7 pF/ft. nom.
Temperature	-20°C to 75°C
Flame Rating	UL 1666 (Riser); CSA C22.2 No. 2556 (FT4)
RoHS Compliant	Yes
Country of Origin	CHINA

PART#	COLOR	LENGTH	BOX
RN-80SR509	GREY	500FT	EXPRESS BOX
RN-80SR109	GREY	1000FT	EXPRESS BOX

RoHS COMPLIANT

Intertek

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands