

WIREFATH

BULK WIRE

NST-224-1000-XXX

22AWG, 4 Conductor, 7 Strands

Features

- Oxygen - Free copper conductors ensure signal integrity

Application


- Stranded security wire for general purpose security
- Low voltage power

Flame Test

- C(UL) Flame Test FT4

Applicable Standards

- NEC/(UL) Specifications CMG
- NEC Articles 800
- CEC/(UL) Specifications CMG

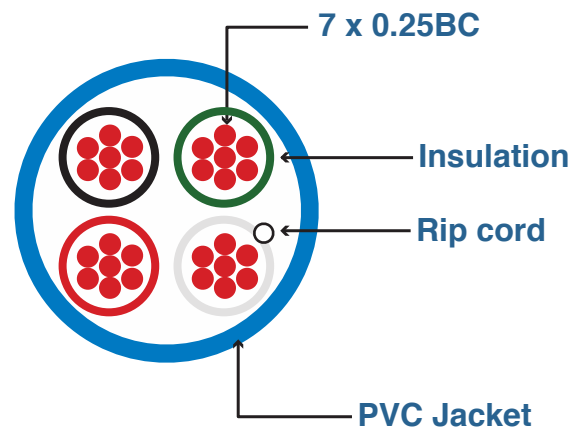

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	75°C
Minimum bending radius		≥ 15 times of overall diameter

WIREFATH

BULK WIRE

Material and Construction		
Construction	4 Conductor	Oxygen Free Copper Wire Strand
	AWG	22
	Stranding	7 Strands * 0.25mm diameter +/- .001
Insulation	Material	PVC (Polyvinyl Chloride)
	Thickness (mm)	0.15
	Insulation Diameter (mm)	1.2 +/- 0.2mm
	Color	As ordered
Rip Cord	Material	Nylon (150D)
Jacket	Material	PVC (Polyvinyl Chloride)
	Nominal Thickness(mm)	0.35 +/- 0.05
	Cable Dia. (mm)	3.6 +/- 0.2
Marking	WirePath™ Bulk Wire by SnapAV, E325177-HY(UL) C(UL), 4 COND 22 AWG 7 STRAND OXYGEN FREE 75°C, DDMMYY, 000/1000 FT ~~~ 998/002 FT	

Physical & Electrical Characteristics (at 20°C)	
Temperature & voltage rating	75°C / 300V
Spark test	2500V DC
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 14.5 Ω/km
Dielectric strength	1500V AC for 2 s
Insulation resistance	≥ 200 MΩ·Km