


DOLPHIN[®]

"THERE'S NO CONNECTION LIKE A DOLPHIN CONNECTION"[™]



DOUBLE ROW TERMINAL BLOCK TB-3-10

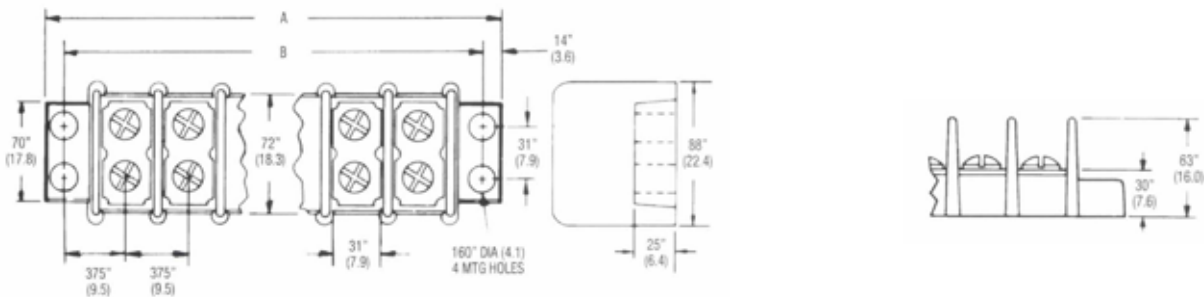

FRACTION DIMENSION

A	B
4-13/32	4-1/8

Construction:	High Barrier Closed-back
Terminal Centers:	.375" (3/8") / 9.5 mm
UL Current Ratings:	20 amps
Voltage Rating, rms	
Class B: Comm 1 equip	250
Class C: Gen 1 ind 1	150
CSA Certified	300 @ 20 amps
Withstand Volts, DC	10,500
Insulator Material:	Thermoplastic, Glass-filled UL Temp Index 100°C UL Flame Retardant Rating 94V-0 Color - Black
Terminal Screws:	No. 6-32 x 1/4" Binding Head Screws Zinc-plated steel
Number of Terminals	10

Contact us for additional product information, catalogs, samples or to find your local distributor.