



IP Enabled



3 Total Outlets



Fireproof MOV



Surge Protection



Filter Banks

The WB-200-IPCE-3 IP+ Controllable Power Conditioner offers professional-grade surge protection and noise filtration that keeps audio/video equipment well protected and working effectively. It's smart enough to reboot devices when network connectivity is lost, so performance stays at a premium.

FEATURES




Protects Expensive Electronics

Provides powerful surge protection for power, coax, and telephone/Ethernet cables. Automatically disconnects equipment during sustained under/over voltage conditions, and reconnects once it's safe.



Improves Audio / Video Performance

Removes noisy interference coming from other components/electronics, providing the best performance possible.

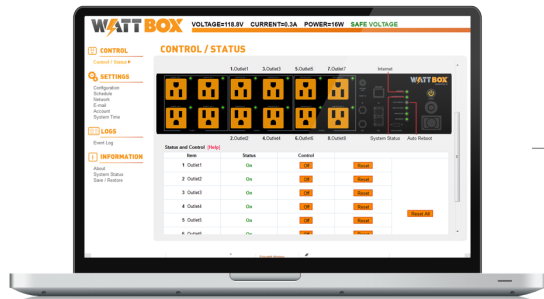


Provides Installer with Remote Access

Allows installers to access the system / equipment remotely, so problems can be fixed offsite and service calls become a thing of the past.

Prevents Equipment from Locking Up

Automatically reboots routers, cable boxes and other devices when they lose network connectivity, so those system issues are avoided.




Self Healing Auto Reboot



LIMITED LIFETIME WARRANTY

This WattBox™ has a Limited Lifetime Warranty and a 5-Year Network Connectivity Warranty. The Lifetime Limited Warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).



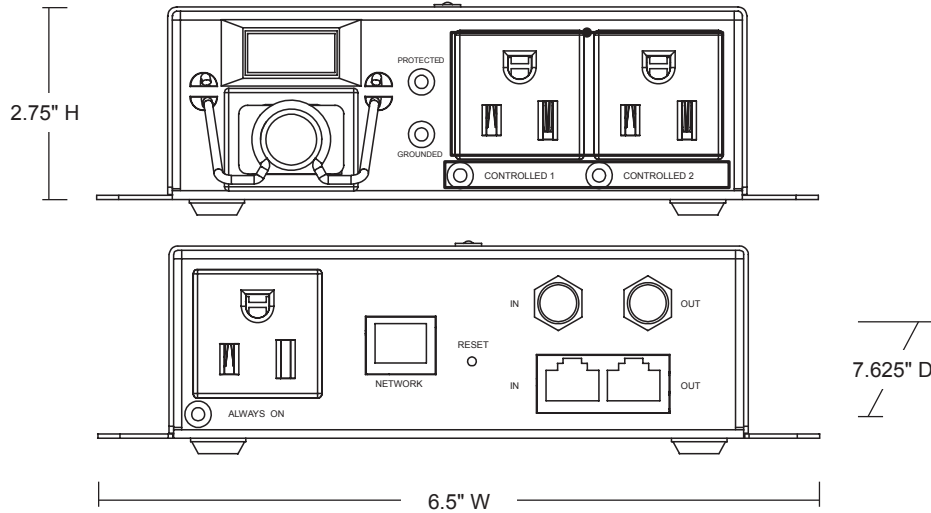

SPECIFICATIONS

AC Power	
Line Voltage	120V, 60Hz
AC Input Connection	IEC C-14
Power Cord Length	4 Feet with 360° Rotating Flat Plug
Breaker/Switch Rating	15A
UL Current Rating	12A
Voltage Protection Rating (UL 1449 3rd Edition)	500V
Joule Rating	2160 Joules
Surge Component	Ceramic Encased MOV
Protection Modes	L-N, L-G, N-G
Peak Impulse Current	48,000A
Disconnect Circuitry	Yes
Thermal Fuse	Yes
EMI / RFI Noise Filtration	
All Outlets	53 dB, 1kHz to 1MHz
Cable / Satellite Circuit	
Connections	Gold Plated "F" Connector
Surge Component	Gas Tube
Clamping Voltage	600V
Frequency Range	0MHz - 3.0 GHz
Insertion Loss	< 0.5 dB
Shielded	Yes
Bi-directional	Yes

Phone / LAN Circuit	
Jacks	RJ45
Accepts	RJ11 & RJ45
Surge Component	Sidactor & MOV
Clamping Voltage	RJ11:500V; RJ45:250V
Wires Protected	8 Wires
Outlets	
Type	NEMA 5-15
Number of Outlets	3
Always On	1
IP Controlled	2
Operating Temperature	
-10°C to 40°C or 14°F to 104°F	
UL Certifications	
UL 60950-1, UL 1449, UL 498, UL 497A/B, UL 1283	
Dimensions	
6.5" W x 2.75" H x 7.625" D	

* Specifications subject to change without notice.

LIMITED LIFETIME WARRANTY

This WattBox™ has a Limited Lifetime Warranty and a 5-Year Network Connectivity Warranty. The Lifetime Limited Warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

