



12 Total Outlets



Fireproof MOV



4320 Surge Protection



Filter Banks

The WB-400-VCE-12 Power Conditioner offers the best of both worlds – professional-grade surge protection and noise filtration – so audio/video equipment is well protected and works effectively. It's built tough with an 18-gauge steel chassis, and is versatile enough to provide easy control in any application.

## FEATURES



### Protects Expensive Electronics

Provides powerful surge protection for power, coax, and telephone/Ethernet cables. Automatically disconnects equipment during sustained under/over voltage conditions, and reconnects once it's safe.



### Improves Audio / Video Performance

Removes noisy interference coming from other components/electronics, providing the best performance possible.

### Provides Versatility

Eliminates unsightly wall warts and cluttered equipment racks, putting the outlets where they're needed for any application or equipment needs.

### Optional Faceplate w/ Easy-to-Read Display


Puts information for utility outlets, input voltage / current readouts, and USB charging front and center. Provides easy access to power for resetting the system and enabling power-saving vacation mode.



# WATT BOX™

## LIFETIME LIMITED WARRANTY

This WattBox™ product has a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

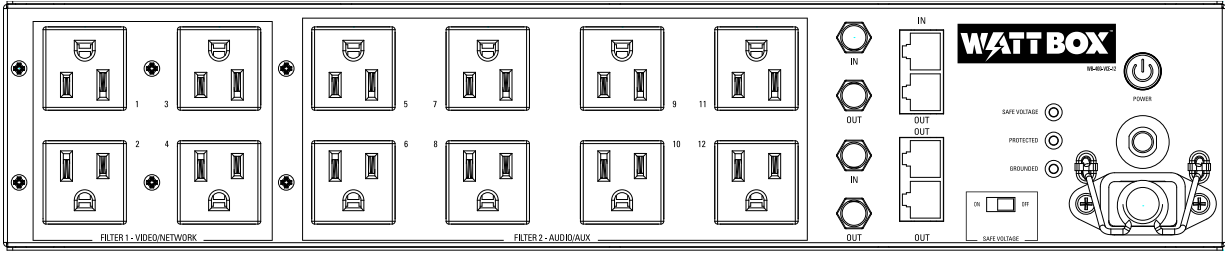

## SPECIFICATIONS

<b>AC Power</b>	
Line Voltage	120V, 60Hz
AC Input Connection	IEC C-14
Power Cord Length	6 Feet
Circuit Breaker Rating	15A
UL Current Rating	12A
Voltage Protection Rating (UL 1449 3rd Edition)	500V
Joule Rating	4320 Joules
Surge Component	Ceramic Encased MOV
Protection Modes	L-N, L-G, N-G
Peak Impulse Current	396,000A
Disconnect Circuitry	Yes
Thermal Fuse	Yes
<b>Safe Voltage Disconnect</b>	
Over Voltage	138 VAC + 2 VAC
Under Voltage	88 VAC + 2 VAC
<b>EMI / RFI Noise Filtration</b>	
Filter Banks 1 & 2	53 dB, 300 kHz to 50 MHz

<b>Cable / Satellite Circuit</b>	
Connections	Gold Plated "F" Connector
Surge Component	Gas Tube
Clamping Voltage	600V
Frequency Range	0MHz - 3.0 GHz
Insertion Loss	< 0.5 dB
Shielded	Yes
Bi-directional	Yes
<b>Phone / LAN Circuit</b>	
Jacks	RJ45
Accepts	RJ11 & RJ45
Surge Component	Sidactor & MOV
Clamping Voltage	RJ11:400V; RJ45:250V
Wires Protected	8 Wires
<b>Outlets</b>	
Type	NEMA 5-15
Numer of Outlets	12
Switched	All
<b>UL Certifications</b>	
UL 60950-1, UL 1449, UL 498, UL 497A/B, UL 1283	
<b>Dimensions</b>	
3.47" H x 17.02" W x 3.47" D	

\* Specifications subject to change without notice.