

MODEL SB-6574UHD VERANDA - 65"

65" VERANDA 4K OUTDOOR LED TV - FULL SHADE

DISPLAY

AVAILABLE COLORS



Black



KEY FEATURES

- Outdoor- safe, built for permanent outdoor installation (full shade applications). Indoor TV
 manufacturers specifically prohibit outdoor use (just check the manual). Don't risk safety and your
 warranty by using an indoor TV outdoors.
- Premium 4K direct-backlit UHD screen with local zone dimming delivers breathtaking, dramatic picture detail with 4 times the resolution of Full HD
- Up to 30% brighter than indoor TVs for improved viewing in brighter outdoor environments
- Supports HDMI 2.0 and HDCP 2.2 ensuring compatibility with the latest 4K sources and streaming services
- Powder-coated rust-proof aluminum exterior protects internal components from rain, snow, dust, insects, humidity, and salt air
- Innovative weather-tight cable entry system seals out moisture and allows for easy hook-ups
- Large media bay with plenty of room for many popular media players, cables, baluns, and extenders
- Built-in 20W down-firing speakers for an all-in-one sound solution, or add an external audio system
- Dispersive temperature regulation system allows operation in low temperatures from -24°F and high temperatures up to 104°F (Storage temperature from -24°F up to 140°F).
- Rear IR receiver in media bay keeps IR emitter hidden & protected
- Weatherproof remote control. Leave it outdoors. Conveniently ready when you need it.
- 4 HDMI and 2 USB inputs provide plenty of connectivity options
- Optional outdoor dust cover (not included)



MODEL SB-6574UHD VERANDA - 65"

SCREEN

SCREEN

65-inch Diagonal Color Active Matrix

TFT LED

RESOLUTION

3840 x 2160 UHD

ASPECT RATIO

16:9

CONTRAST RATIO

4000:1

FRAME RATE

60 Hz

VIEWING ANGLE

178° x 178°

RESPONSE TIME

6.5 milliseconds

TV FORMATS

2160p, 1080p, 1080i, 720p, 720i, 480p,

480i

CONNECTIONS

RF

Antenna/CATV (ATSC/QAM/NTSC) x1

HDMI

HDMI™ Input x4 (HDMI 1.4, HDMI 2.0,

HDCP 2.2) 3840 x 2160 @ 60hz

VIDEO COMPOSITE

Composite Video x1, L/R Audio Inputs

х1

VIDEO COMPONENT

YPbPr plus Stereo Audio x1

CONTROL SET

Concealed Rear IR Window

AUDIO OUT

Digital TosLink Optical Audio(fixed)

RCA L+R (variable)

SPEAKERS

20 WATT internal speakers

INPUT POWER

100-240 VAC, 50-60 Hz 2.8 A Max

(205 Watts/1.8a@120v)

TEMPERATURE TOLERANCES

OPERATING TEMP

-24° to 104° F. (-31° to 40°C.)

NON-OP. TEMP

-24° to 140° F. (-31° to 60°C.)

PHYSICAL SPECS

ACCESSORIES INCLUDED

Weatherproof remote control

EXTERIOR

Powder-coated aluminum.

EXTERIOR COLORS

Black Only

TV DIMENSIONS

58.2" W x 34" H x 4" D

(1480mm W x 863mm H x 102mm D)

TV WEIGHT

70 lbs (31.75 kgs)

VESA MOUNT PATTERN

400mm x 400mm

SHIPPING DIMENSIONS

65.5" W x 43" H x 9" D

SHIPPING WEIGHT

91 lbs


RESIDENTIAL WARRANTY

1 Year Parts and Labor

Rev. 08/05/2016

Specifications SunBriteTV Model SB-6574HD

LCD Screen	65-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k
Aspect Ratio	16:9
Blacklight Brightness - Surface Luminance, white	350 nits (cd/m2)
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	6.5 milliseconds
TV formats	2160p*,1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors: RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x4 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
Control Set	Discrete IR Control, Concealed rear IR receiver
Audio Out	Tos-Link Optical audio (Fixed) Analog RCA jacks (variable)
Speakers	20 Watt downfiring internal speakers
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.6a@120v)
Operating Temp.	32° to 104° F. (0° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery, Dust Cover
TV Dimensions	58.2" W x 34" H x 4.00" D 1480mm W x 863mm H x 102mm D
TV Weight	70.0 lbs.(31.75 kgs)
Residential Warranty	1 year
2 08 2017	

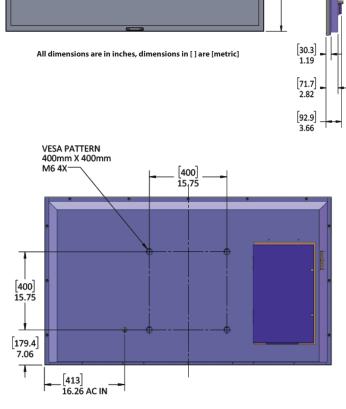

Front View

[1479.9] 58.26

[102.3] 4.03

[863.4] 33.99

Specifications are subject to change.