

# Versatile. Smart. Surveillance.

## Visualint™ 2MP IP Bullet Outdoor Camera with Starlight and Motorized Lens + Virtual Technician


Featuring a 2.8–12mm motorized lens\*, this bullet camera fits a variety of short-range or wide-range installs. It comes standard with Visualint's ultra low-light Starlight color sensor so images appear clear even in the dark, plus built-in IR ranging up to 30m, and more.

\*For installation purposes only



VI-M-1550-VT

### Key Features

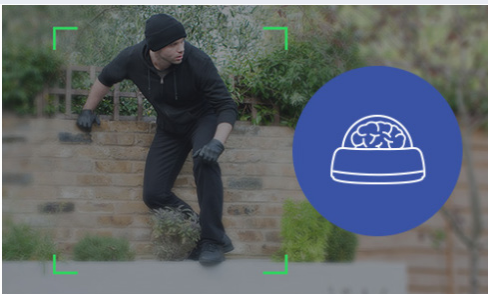

Embedded Intelligent Analytics



Professional Video Monitoring




Enhanced Control & Integration

Without Starlight



With Starlight

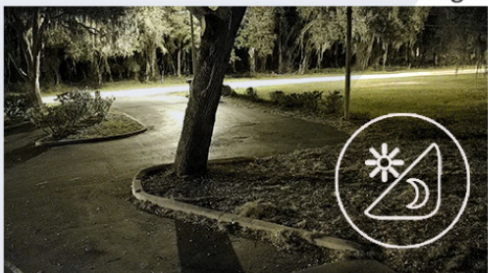

Starlight Low-Light Color Sensor



Widescreen & High Definition


## Product Features

Technical Specs & Features	VI-M-1550-VT
Audio Inputs / Outputs	1-ch / 1-ch
Image Sensor	2MP 1/2.8" Starlight CMOS
Maximum Record Resolution	1920 × 1080
Lens	Motorized 2.8-12mm, F1.2
Est. Horizontal Viewing Angle	92° ~ 38.6°
Minimum Illumination	Color: 0.002Lux (F1.2,AGC ON) Black&White: 0.001Lux (F1.2,AGC ON) 0 Lux with IR
IR Range	98 ft - 164 ft
Remote Monitoring Integration	Immix
Recording Trigger	No
Full Screen Monitoring	Yes
Image Snapshot	Yes
Audio Support	1-ch, G.711A/G.711U/ADPCM/AAC
Triggered Action Desc.	Email, HTTP Notification, FTP
SD Card Support	Micro SD Card Slot, up to 128GB
Network / Ethernet Desc.	10M/100M Ethernet Interface
Supported Network Protocols	TCP, UDP, HTTP, MULTICAST, UPnP, DHCP, PPPoE, DDNS, NFS, FTP, NTP, RTP, RTSP, IPv6, SNMP, SMTP
Power Consumption	DC12 V, PoE (802.3af) 2W (IR OFF) 4W (IR ON )
Color	Two-tone White & Black
Dimensions (W x H x D)	4.2" x 4.2" x 13"
Weather Rating	IP66
Certifications	CE, FCC
Operating Temperature	-20-140°F, 0~95% RHG
Weight	3 lb

### IP66 Rating



### Multiple Video Streams and Snapshots

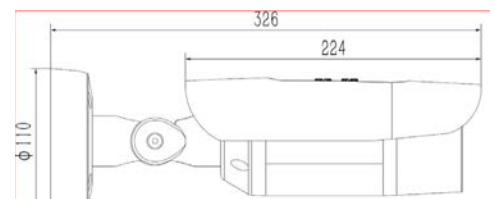

Note: Dimensions are measured in mm.