

# Versatile. Smart. Surveillance.

## Visualint™ 4MP IP Bullet Outdoor Camera with Motorized Lens + Virtual Technician

This 4MP motorized\* bullet camera showcases high-res images at a full 25 frames per second. It also comes standard with built-in IR ranging up to 30 meters, glass optics and other convenient features. Included Virtual Technician services even configure analytics, set notifications, and offer a follow-up calibration for any custom install.



VI-M-3140-VT

\*For installation purposes only

### Key Features



Embedded Intelligent Analytics



Professional Video Monitoring




Enhanced Control & Integration


Without Starlight



With Starlight

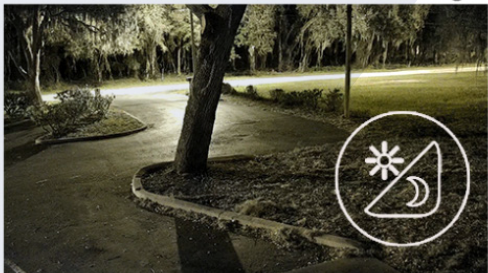

Starlight Low-Light Color Sensor

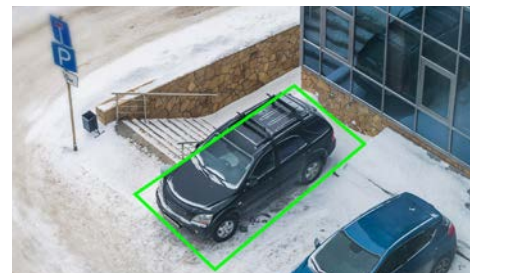

Widescreen & High Definition


## Product Details

Technical Specs & Features	VI-M-3140-VT
Audio Inputs / Outputs	1-ch / 1-ch
Image Sensor	4MP 1/3" OV CMOS (No Starlight)
Maximum Record Resolution	2560 x 1440
Lens	Motorized 2.8-12mm, F1.4
Est. Horizontal Viewing Angle	92° ~ 38.6°
Minimum Illumination	Color: 0.05Lux (F1.4,AGC ON) Black&White: 0.01Lux (F1.4,AGC ON) 0 Lux with IR
IR Range	98 ft - 164 ft
Remote Monitoring Integration	Immix
Recording Trigger	No
Full Screen Monitoring	Yes
Image Snapshot	Yes
Audio Support	1-ch, G.711A/G.711U/ADPCM/AAC
Triggered Action Desc.	Email, HTTP Notification, FTP
SD Card Support	Micro SD Card Slot, up to 128GB
Network / Ethernet Desc.	10M/100M Ethernet Interface
Supported Network Protocols	TCP, UDP, HTTP, MULTICAST, UPnP, DHCP, PPPoE, DDNS, NFS, FTP, NTP, RTP, RTSP, IPv6, SNMP, SMTP
Power Consumption	DC12 V, PoE (802.3af), 3W (IR OFF), 8W (IR ON)
Color	Two-tone White & Black
Dimensions (W x H x D)	4.2" x 4.2" x 13"
Weather Rating	IP66
Certifications	CE, FCC
Operating Temperature	-20-140°F, 0~95% RHG
Weight	3 lb

### IP66 Rating



### Multiple Video Streams and Snapshots

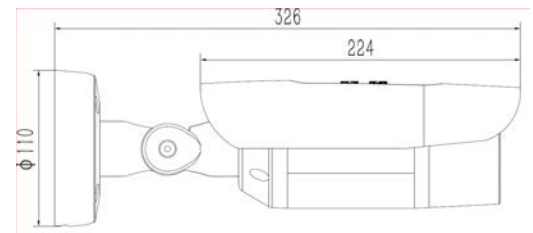

Note: Dimensions are measured in mm.