

# Hi-Res Images. Same Great Surveillance.

## Visualint™ 2MP IP Dome Camera with Starlight and Motorized Lens + Virtual Technician

This 2MP motorized\* dome camera showcases high-res images at a full 30 frames per second. Plus, Visualint's intelligent analytics and Starlight color sensor help you see whatever you need in the dark. It's vandalproof, comes with built-in IR ranging from 30-50m, features glass optics & metal housing, and more.

\*For installation purposes only



VI-M-4350-VT

### Key Features



Embedded Intelligent Analytics



Professional Video Monitoring



Enhanced Control & Integration


Without Starlight



With Starlight



Starlight Low-Light Color Sensor

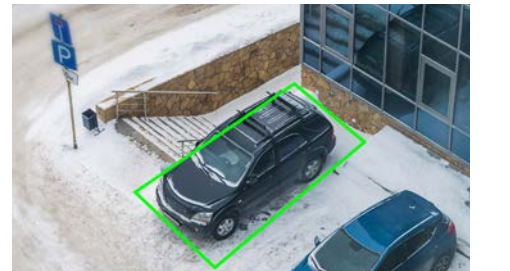

Widescreen & High Definition


## Product Specs

Technical Specs & Features	VI-M-4350-VT
Audio Inputs / Outputs	1-ch, Built-in Mic / 1-ch
Image Sensor	2MP 1/2.8" Starlight CMOS
Maximum Record Resolution	1920 × 1080
Lens	Motorized 2.8-12mm, F1.2
Est. Horizontal Viewing Angle	92° ~ 38.6°
Minimum Illumination	Color: 0.002Lux (F1.2,AGC ON) Black&White: 0.001Lux (F1.2,AGC ON) 0 Lux with IR
IR Range	65 ft - 98 ft
Remote Monitoring Integration	Immix
Recording Trigger	No
Full Screen Monitoring	Yes
Image Snapshot	Yes
Audio Support	1-ch, G.711A/G.711U/ADPCM/AAC
Triggered Action Desc.	Email, HTTP Notification, FTP
SD Card Support	Micro SD Card Slot, up to 128GB
Network / Ethernet Desc.	10M/100M Ethernet Interface
Supported Network Protocols	TCP, UDP, HTTP, MULTICAST, UPnP, DHCP, PPPoE, DDNS, NFS, FTP, NTP, RTP, RTSP, IPv6, SNMP, SMTP DC12 V, PoE (802.3af)
Power Consumption	3W (IR OFF) 8W (IR ON)
Color	White
Dimensions (W x H x D)	5.9" x 4.8" x 5.9"
Weather Rating	IP66
Certifications	CE, FCC
Operating Temperature	-20-140°F, 0~95% RHG
Weight	2 lb

### IP66 Rating



### Multiple Video Streams and Snapshots

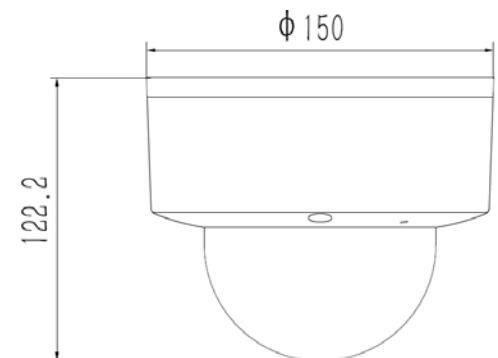

Note: Dimensions are measured in mm.