

420  
SERIES



## Summary

This low-profile, motorized, bullet IP camera features 4MP resolution for 2K viewing. This low-profile, motorized, turret IP camera features 4MP resolution for 2K viewing. Reduce false notifications and easily highlight and access key moments with built-in intelligent analytics. Using Starlight, the camera can provide crisp nighttime images in low-light environments. With OvrC, on-site or remote configuration is a breeze, no longer requiring you to tediously navigate each camera's local UI. Adjust image settings in real-time, setup recordings, and more all via OvrC. Control System integration is always top of mind, and this camera is packed with features for Control4 along with many other popular control systems.

## Features

- AI-filtered events
- H.265+ /H.265 /H.264+/H.264/MJPEG
- Max. resolution: 2560 x 1442
- ICR auto switch, true day/night vision
- Starlight with 50-70m IR night view distance
- 2.8mm - 12mm motorized zoom lens
- Support image distortion correction
- 3D DNR, true WDR, HLC, BLC, Defog, NIR, Smart IR and ROI coding
- Built-in micro SD card slot; up to 256GB
- AC24V/DC12V/PoE power supply
- IP67 ingress protection
- Support four streams
- Remote monitoring support via Luma View app


## Mounting Accessories (optional)



Junction Box LUM-A20-JB-FX-BT  
Wall Mount Bracket LUM-A20-WMB-VF-TD  
Ceiling Mount LUM-A20-CM-VF-TD

## Dimensions

Unit: mm

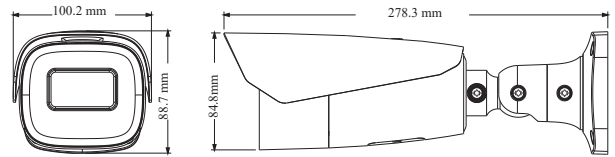

## Specifications

Product	LUM-420-IP-BM
Resolution	2560 x 1440
Shutter Speed	1s - 1/100000s
Min. Illumination	0.0014 lux, AGC ON; 0 lux with IR
Lens	2.8 - 12mm
Aperture	F1.5
Field of View	Horizontal: 109° - 46° Vertical: 74.5° - 27.1° Diagonal: 116° - 52.4°
IR Range	50 - 70m
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital Noise Reduction	Yes
Angle Adjustment	Pan: 0° - 360°/Tilt: 0° - 90°/Rotation: 0° - 360°
Video Compression	H.265+/H.265/H.264+/H.264
Main Stream	H.265(+): 2560 x 1440 30fps H.264(+): 2560 x 1440 30fps H.265(+): 2304 x 1296 30fps H.264(+): 2304 x 1296 30fps H.265(+): 1920 x 1080 30fps H.264(+): 1920 x 1080 30fps H.265(+): 1280 x 720 30fps H.264(+): 1280 x 720 30fps
Sub & Third Stream	H.264: 704 x 480 (30fps)
Fourth Stream	H.265: 1920 x 1080 30fps H.264: 1920 x 1080 30fps MJPEG: 1920 x 1080 30fps H.265: 1280 x 720 30fps H.264: 1280 x 720 30fps MJPEG: 1280 x 720 30fps
Audio & Alarm	Audio input & output 1 x Alarm input 1 x Alarm output
Storage	Built-in micro SD card slot Up to 256GB
Reset Button	Yes
ONVIF Compliance NDAA Compliant	Yes/Yes
Basic Event	Motion Detection/SD Card Full/SD Card Error
AI Event	Line Crossing/Region Intrusion/Region Entrance/Region Exit/Target Counting
AI Category	Human/Motor Vehicle/Non-motor Vehicle
Protection	IP67
Power Supply	DC12V/PoE
CVBS Output	Yes (Pigtail & Test Port)
Power Consumption	< 12.5W
Operating Temperature & Humidity	-22 F - 140F (-30 C - 60C) Less than 95% (non-condensing)
Dimensions & Weight	278.3mm x 100.2mm x 88.7mm, 1.04KG (2.29lbs)
Certifications	ETL Listed, CE, FCC