

WIREFATH SURVEILLANCE

WPS-500/750-PTZ-A-WH

500 & 750 Series Analog PTZ Outdoor Cameras



Get the latest in surveillance technology with these outdoor pan/tilt/zoom cameras. They feature an optical zoom lens and 680 TVL resolution. Precision PTZ control lets the user dictate speed and range of motion through sophisticated technology. They also feature 128 preset positions for unlimited coverage, and mobile apps (through the DVR) for iOS® and Android for on-the-go monitoring.

Features



High Resolution



Optical Zoom



IP66 Rated



Adjustable Lens



Samsung Super Dynamic Range

See What You Want

Six programmable vector scan zones, and PTZ joystick control give you the flexibility you need to ensure the full-area coverage.

Privacy Masking

On the 750 model, user-defined privileged areas can be blocked for privacy.

Smart IR (750 only)

The built-in infrared illuminators reach out to 350' and focus in parallel with the camera lens for the best in low-light recording.

Motion Detection


User-defined areas can be defined to begin recording upon detecting motion.



3-Year Limited Warranty

This camera has a 3-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).

DIMENSIONS

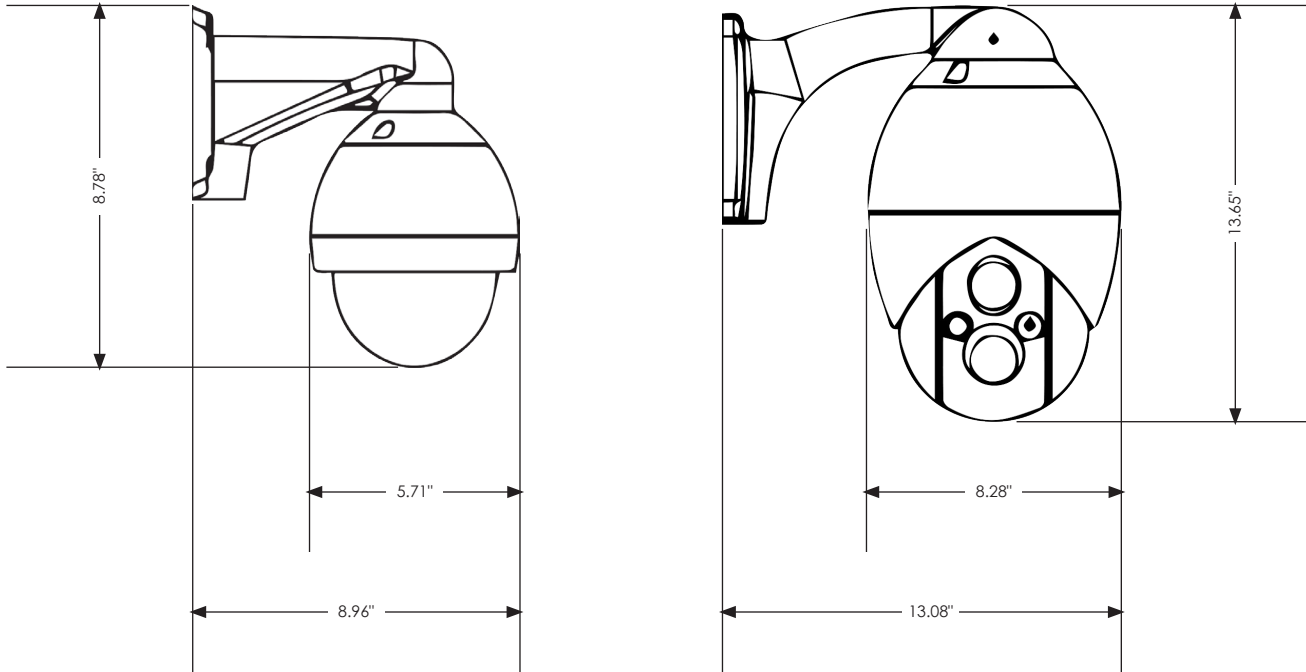

SPECIFICATIONS

Category	WPS-500-PTZ-A-WH	WPS-750-PTZ-A-WH
Image sensor	1/4" Samsung Interline Transfer CCD	
Lens Type	12x, 3.94mm to 46.05mm	37x, 3.5mm to 129.5mm
Picture Quality	Color: 560 TV Lines B/W: 680 TV Lines	
Minimum Illumination	Color: 0.2 Lux/F1.6 (50 IRE) B/W: 0.02 Lux/F1.6 (50 IRE)	
True Day/ Night (IR Cut Filter)	Auto / Color / B/W / External	
Pan / Tilt Range	Pan: 0°-360° Tilt: 6.6°-90° with Auto Flip	Pan: 0°-360° Tilt: 0°-90° with Auto Flip
Manual Control	Pan: 0.05°-300°/s Tilt: 0.05°-150°/s	Pan: 0.1°-150°/s Tilt: 0.1°-55°/s
Preset Speed	400°/s	240°/s
Preset Points	128	
Preset Accuracy	0.3°	
BLC, HLC, AGC	Yes	
SSDR	Yes	
Privacy Mask	None	8 programmable zones

Category	WPS-500-PTZ-A-WH	WPS-750-PTZ-A-WH
Heater	Yes	
Infrared	None	Smart IR to 350'
Weather	IP66	
RS-485 control	Pelco-D or Pelco-P	
Dimensions (without mount)	6.22" H x 5.71" OD	10.89" H x 8.28" OD
Height with wall mount arm	8.78"	13.65"
Wall Mount Footprint	3.94" W x 4.73" H	4.73" W x 6.89" H
Mount Arm Extension	8.96"	13.08"
Weight (without mount)	7.7 lb	19.3 lb
Power Consumption	Max: 20W	Max: 30W
CE, FCC, RoHS	Yes	
External Power Supply	Yes	
Operating Voltage	24VAC 3A 50-60Hz	
Operating Temperature	-22°F to 122°F	-40°F to 122°F
Ratings / Certifications	FCC Part B, CE	

3-Year Limited Warranty

This camera has a 3-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).