# WIREPATH

#### WPS-750-BUL-AH

# 750 Series 650 TVL Analog Bullet Cameras (White and Gray)



The WPS-750-BUL-AH Day/Night Outdoor Varifocal Bullet Cameras provide optimal performance with maximum visibility, a high resolution, clear video, and an adjustable field of view. These smart cameras are ideal for use in perimeter monitoring, warehouses, entrances, and a variety of other commercial and residential applications.

#### **Features**











High-Resolution

Sense-Up

Outdoor-Rated

Adjustable Le

S-WDI

#### Provides Crisp, Clear Images

Uses Super Wide Dynamic Range (S-WDR) to create even lighting and clear images in areas with lots of natural light, and features a digital signal processor that produces crisp, clean pictures.

#### Sees in the Dark

Eliminates overexposure to evenly illuminate subjects in dark lighting, and displays bright images even in the dark.

#### **Keeps Designated Areas Private**

Blocks out sensitive or privileged areas defined by users to ensure privacy of controlled access areas or home interiors.

#### **Built-In Heater**

Equipped with a built-in heater that turns on and off automatically to raise the internal temperature, remaining operationally efficient with no picture loss from -40° F to 140° F.








### **5-Year Limited Warranty**

This camera has a 5-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).



#### 750 Series 650 TVL Analog Bullet Cameras (White and Gray)

# DIMENSIONS

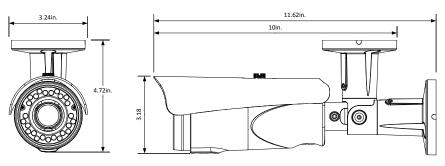

## **SPECIFICATIONS**

Image Sensor	1/3" Color Sony Super HAD II
Number of Pixels	NTSC:768(H)x494(V)
Lens	4~9mm Auto Iris Vari-Focal Lens, Horizontal FOV 60°(W)~30°(T)
Shutter Control	60~1/100,000 sec
Video Test Port	Yes
Auto IRIS	Yes
Auto Electronic Shutter	ON
Auto Gain Control	ON
Back Light Compensation	ON
Auto White Balance	ON
Sync. Mode	Internal Sync
Scanning System	2:1 Interlace
Resolution	550 TV Lines
S/N Ratio	>48dB
Gamma	0.45
Minimum illumination	0.01 Lux color, 0 Lux IR on
IR LED Count	24
IR Range	80 ft.
Smart IR	Yes
Horizontal Sync. Frequency	NTSC: 15.734KHz
Video Output	1.0Vp-p,75ohm
Power Source	12 VDC (500 mA) – Not included
Power Consumption	3.6W 300mA
Operating Temperature	14F-140F
Weather Proof	IP66 Grade
Certifications	CE, FCC, ROHS
Dimensions	4.04" H x 5.91" W

### **5-Year Limited Warranty**

This camera has a 5-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).