

WPS-MNT-IC-DOM-WH

Dome Camera In-Ceiling Mount

Thank you for purchasing a Wirepath™ Surveillance accessory. This in-ceiling mount allows you to install a Wirepath dome camera into a ceiling so that only the dome is exposed. This product is used for installation in ceilings with a maximum thickness of 1.85" (47mm).


Mounting and Use Guidelines

- Install only in areas where water cannot enter the opening made for the bracket.
- Ceiling must be able to hold the weight of the mounted camera assembly.
- Secure the camera assembly to the ceiling structure with a tie wire where required by building codes.

Package Contents

- A in-ceiling bracket
- B trim ring
cutout template (not pictured)

A. In-Ceiling Bracket

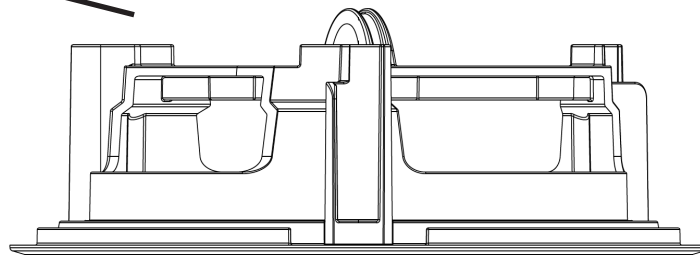


B. Trim Ring



Dome Camera In-Ceiling Mount

Dimensions

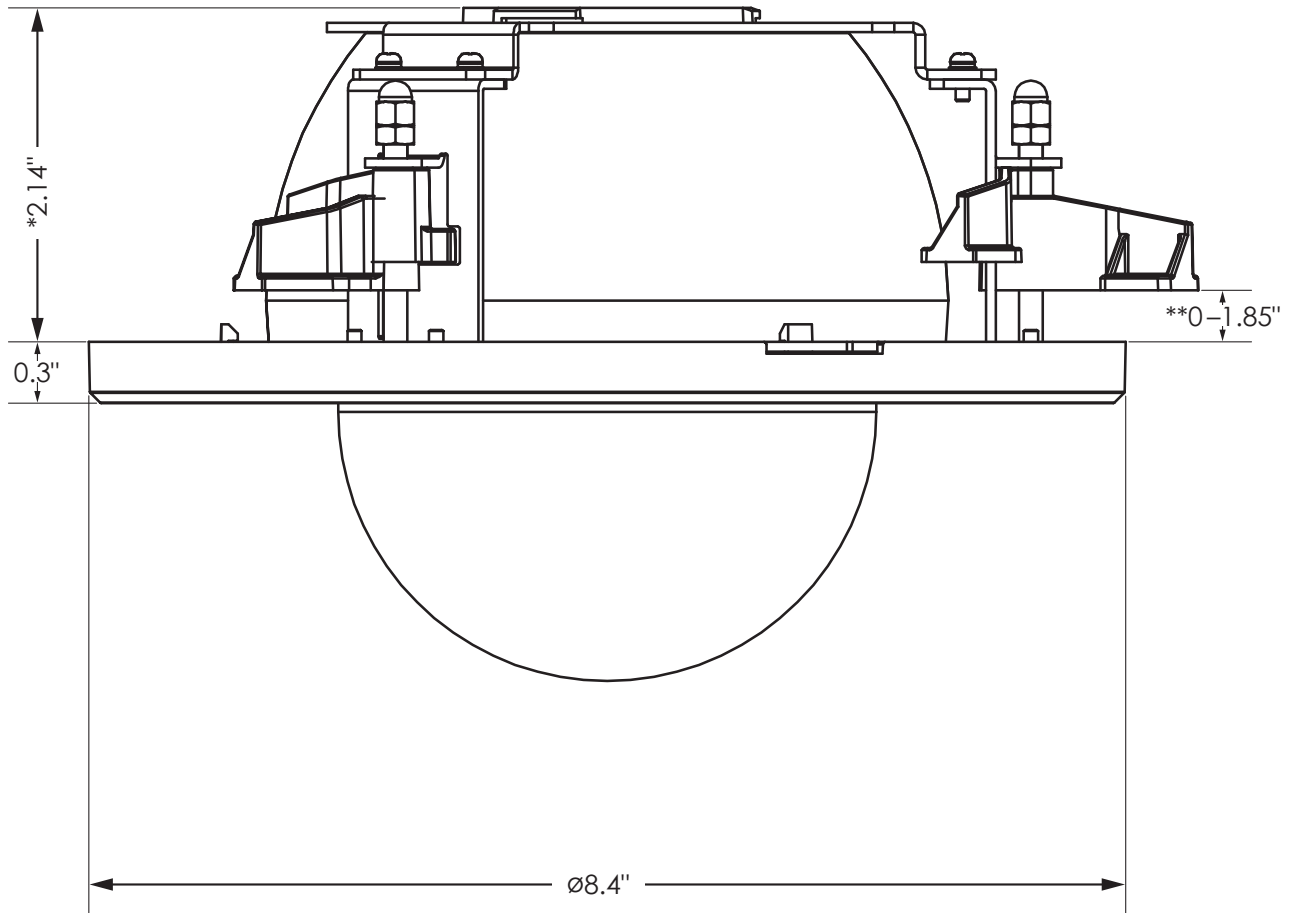

* Dimension includes height of camera installed in the bracket.

** Represents the range of ceiling material thickness the dog toggles can clamp to.

Specifications

Weight	0.625 lb
Maximum Ceiling Thickness	1.85"

5-Year Limited Warranty

This accessory has a 5-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products that have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Wirepath™ Surveillance or a designated service center with prior notification and an assigned return authorization number (RA).

Contacting Tech Support

Phone: 866.838.5052

Email: TechSupport@SnapAV.com

Rev. 150316-1410

WIRE**PA**TH
SURVEILLANCE

© 2015 Wirepath™ Surveillance