

SILVER OMNI SE

IN-CEILING, IN-WALL SPECIAL EDITION



SILVER OMNI SE

IN-CEILING, IN-WALL SPECIAL EDITION

The Silver Omni Special Edition's calculated design leaves a minimal footprint but delivers striking, full-range sound in virtually any setting. Two configurations offer diverse installation options, both featuring studio-grade drivers and crossovers for articulate, extended bass, crystal-clear treble, and substantial output. Ceiling-mounted speakers can project directly to the listener through unique, angled baffles, and fully engineered sealed, and braced enclosures ensure sound isolation. The Silver Omni SE can be used for two-channel systems in smaller rooms, upgraded distributed audio, or as part of an intimate home theater system as a sat/sub partnership. In an industry of generic, mass-produced products, Triad combines craftsmanship and customization in every order. Handcrafted in the US using the finest materials and components, Triad's sealed-box enclosures deliver intricate acoustics and effortless playback, actualizing the artist's intent.

Use as a capable, standalone pair of speakers, or create a full-range surround sound experience by pairing with Triad Subs. Enjoy a custom theater experience in your bedroom, den, or family room with impressive musical results and low visual impact delivered through Triad's Silver Omni SE.

FEATURES

- Compact, flat design
- AcoustiPerf frameless metal grill

ENCLOSURE

- Fully engineered, premium MDF enclosure
- Acoustic suspension
- Two-way design
- Custom paint matching available
- Braced enclosure keeps sound from bleeding into adjacent rooms

SILVER OMNI SE IN-CEILING, IN-WALL SPECIAL EDITION

SPECIFICATIONS

	MATERIALS	IN-CEILING/8	IN-WALL/4
	Tweeter size	(1) 1" (25 mm)	(1) 1" (25 mm)
	Tweeter type	Fabric dome	Fabric dome
	Woofer size	(1) 5 1/4" (14 cm)	(1) 5 1/4" (14 cm)
	Woofer type	Paper/fiber blend	Paper/fiber blend
	PERFORMANCE	IN-CEILING/8	IN-WALL/4
	Recommended amplifier power	50 - 150W	50 - 150W
	Impedance	8 ohms	8 ohms
	Sensitivity (dB @ 2.83V, 1 m)	85 dB	85 dB
	Frequency response (+/- 3 dB)	80 Hz - 20 kHz	80 Hz - 20 kHz
	DIMENSIONS	IN-CEILING/8	IN-WALL/4
	Cabinet specifications (L x W x D)	10 3/4" x 10 3/4" x 7 1/2" (27.3 x 27.3 x 19.1 cm)	11 15/16" x 8 3/16" x 3 15/16" (30.3 x 20.8 x 9.9 cm)
	Hole cutout (L x W)	10 7/8" x 10 7/8" (27.6 x 27.6 cm)	12 1/16" x 8 5/16" (30.6 x 21.1 cm)
	Frameless grill dimensions (L x W)	12 1/16" x 12 1/16" (30.6 x 30.6 cm)	13 1/4" x 9 1/2" (33.7 x 24.1 cm)
	NCB size	S	B
	Product weight (ea.)	11 lb (5 kg)	8 lb (3.6 kg)
	Shipping weight (ea.)	15 lb (6.8 kg)	12 lb (5.4 kg)
	PRODUCT NUMBERS	IN-CEILING/8	IN-WALL/4
	Wall mounting	-	45402-1000-2
	Right-side mounting	55602-1100-2	-
	Left-side mounting	55602-1200-2	-


Product page



triadspkrs.co/
silvomni-se

DIMENSIONS

IN-CEILING

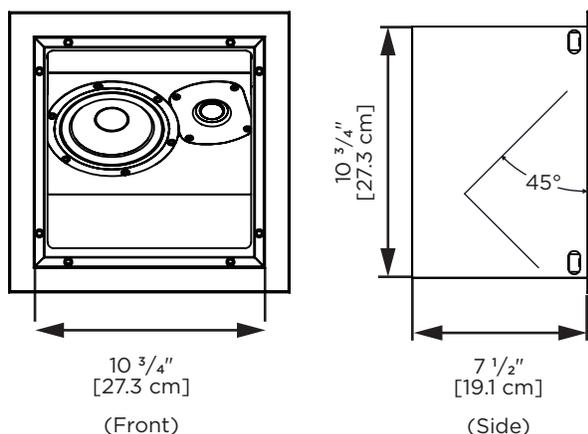

IN-WALL

