

TRIAD QUICK START GUIDE - ONWALL MICRO LCR & SAT

OVERVIEW

The OnWall Micro is the perfect solution for giving wall-mounted plasma or LCD televisions excellent sound quality in a slim, handsome package. Their accuracy makes them great for music applications, but they especially excel at reproducing demanding movie soundtracks in multichannel systems. Although the Micro can be used without a subwoofer in smaller venues, it is a great choice for home theaters when used with one or more Triad Subs giving you great sound without big, bulky boxes!


IN THE BOX



Soundbar




Grill



Mounting template

EZ Mount Bracket and Hardware

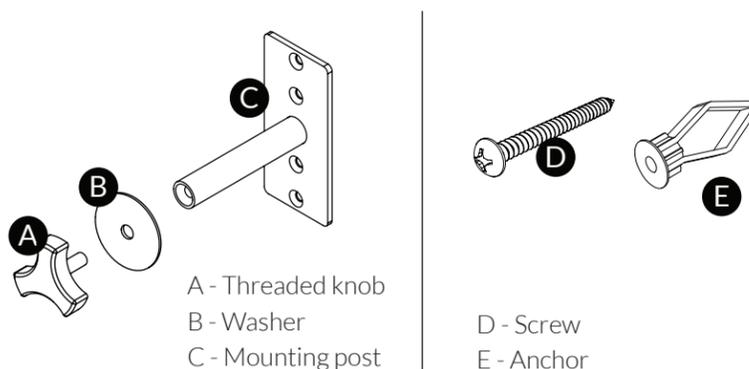

x2 ea

x8 ea

NOTE: For safety, models longer than 66 inches (1676.4mm) include 4 sets of EasyMount Brackets & Hardware. If your speaker includes 4 sets, use them as per instructions.

SPECIFICATIONS

Applicable Models	Dimensions (in)	Weight lbs./kg	EZ Mount Post	Rec. Amp Power per channel	Rec. Sub Xover <3" from wall/ >3" from wall	Sensitivity 2.83v, 1m	Freq Response +/- 3dB, 2pi**	Nominal Impedance
OnWall Micro LCR 1.0	24"w x 4.5"h x 3.625"d	7.2 lbs. / 3.26 kg	2.75"	75-125 watts	140/150 Hz	85 dB	128 Hz - 20 kHz	4 ohms
OnWall Micro LCR 2.0	40"w x 4.5"h x 3.625"d	11.8 lbs. / 5.3kg	2.75"	75-125 watts	140/150 Hz	85 dB	128 Hz - 20 kHz	4 ohms
OnWall Micro LCR 3.0	42"w x 4.5"h x 3.625"d	13.3 lbs. / 6kg	2.75"	75-125 watts	140/150 Hz	85 dB	128 Hz - 20 kHz	4 ohms
OnWall Micro Sat 1.0	24"w x 4.5"h x 2.75"d	6.2 lbs. / 2.8 kg	2"	50-125 watts	140/150 Hz	89 dB	128 Hz - 20 kHz	8 ohms
OnWall Micro Sat 2.0	40"w x 4.5"h x 2.75"d	10.3 lbs. / 4.7 kg	2"	50-125 watts	140/150 Hz	89 dB	128 Hz - 20 kHz	8 ohms
OnWall Micro Sat 3.0	40"w x 4.5"h x 2.75"d	11.2 lbs. / 5.1 kg	2"	50-125 watts	140/150 Hz	89 dB	128 Hz - 20 kHz	8 ohms

** 2 pi Frequency Response specifications are measured with wall or other boundary reinforcement nearby.

NOTE: All Micro models use 1" Fabric Dome Tweeters and 3" Polycone Woofers.

WARRANTY

Triad speakers are warranted to be free from defects in manufacturing and workmanship (10) years when operated under normal conditions. Should any such defects occur within the warranty period call Triad Service at 1-877-264-6315 for an RA (Return Authorization) number. Return the product in intact factory packaging with RA number clearly visible on outside of box and proof & date of purchase inside to:

Triad Speakers Inc.
15835 NE Cameron Blvd.
Portland, Oregon 97230 USA

Triad is not responsible for any shipping damage coming in to Triad. If you do not have intact factory packaging, contact your dealer or Triad Service for purchase. At our discretion we will repair or replace the product and return it free of charge. International customers should contact their dealer for service. This limited warranty is extended only to Triad products and is expressly in lieu of all other warranties expressed or implied.

FINISH MAINTENANCE & CARE

The paint and veneer finish on all Triad speakers are designed to last a lifetime with minimal care. No polishing is necessary to maintain surface shine and luster. If cleaning the surface becomes necessary gently wipe the speaker box with a soft cloth lightly dampened with a mild soap and water solution.

CUSTOM PAINT

If you wish to change a grill color, we suggest you order a new grill from your authorized Triad dealer, supplying your paint sample at that time. The results will be superior, and you will also be supplied with a small bottle of touch-up paint.

ADDITIONAL INFO


Triad's EasyMount wall bracket, included with each speaker, is quick & easy to install, adds no depth, and allows up to .5 inch (12.7mm) horizontal and vertical adjustments for leveling or aligning.

FOR MOUNTING WITH BRACKETS (e.g. Cheif) that use 1/4-20 inserts:

OnWall Micro Sat 1.0, 2.0, 3.0 & OnWall Micro LCR 1.0, 2.0, 3.0 replace their previous rear panel 1/4-20 inserts with EZ Mount Posts tapped for 1/4-20 bolts. Simply attach the EZ Brackets to the enclosure as shown in Page 2, but do not attach them to the wall. Screw the 1/4-20 bolts into the backs of the posts.


TRIAD QUICK START GUIDE - ONWALL MICRO LCR & SAT

Wall Mount Installation

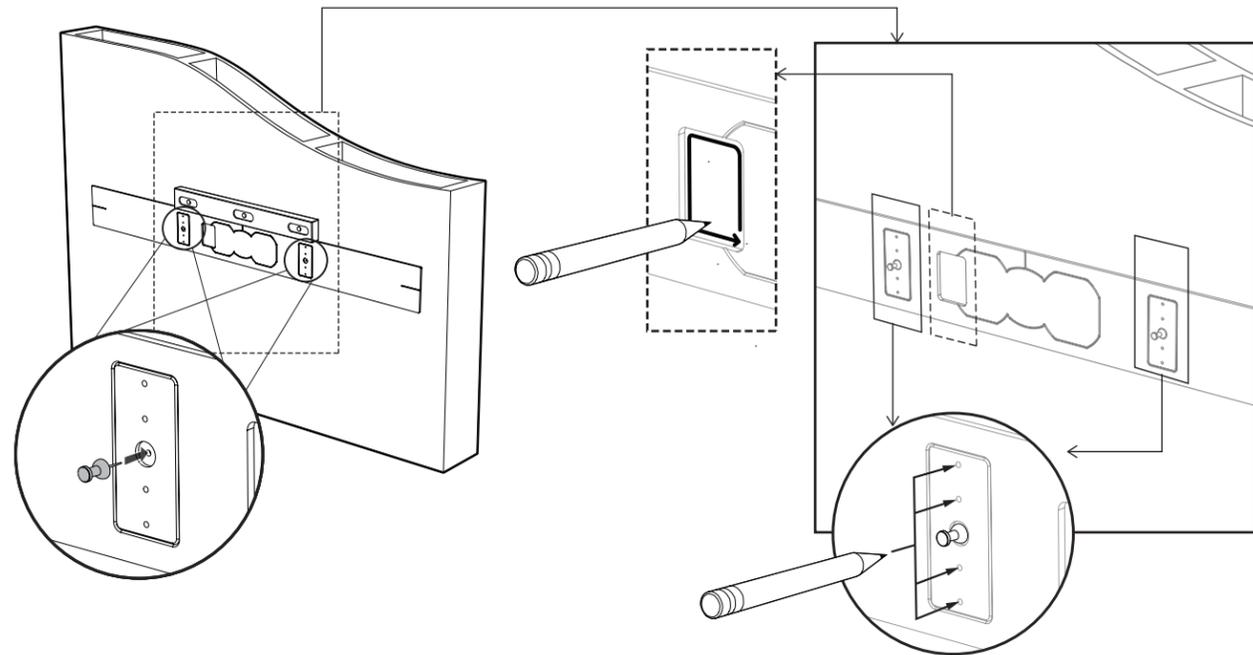


1 Use level and included pushpins to secure Mounting Template to wall in desired mounting location.

2 Use a pencil to mark holes for EZ mounts and rectangle hole for speaker wires.

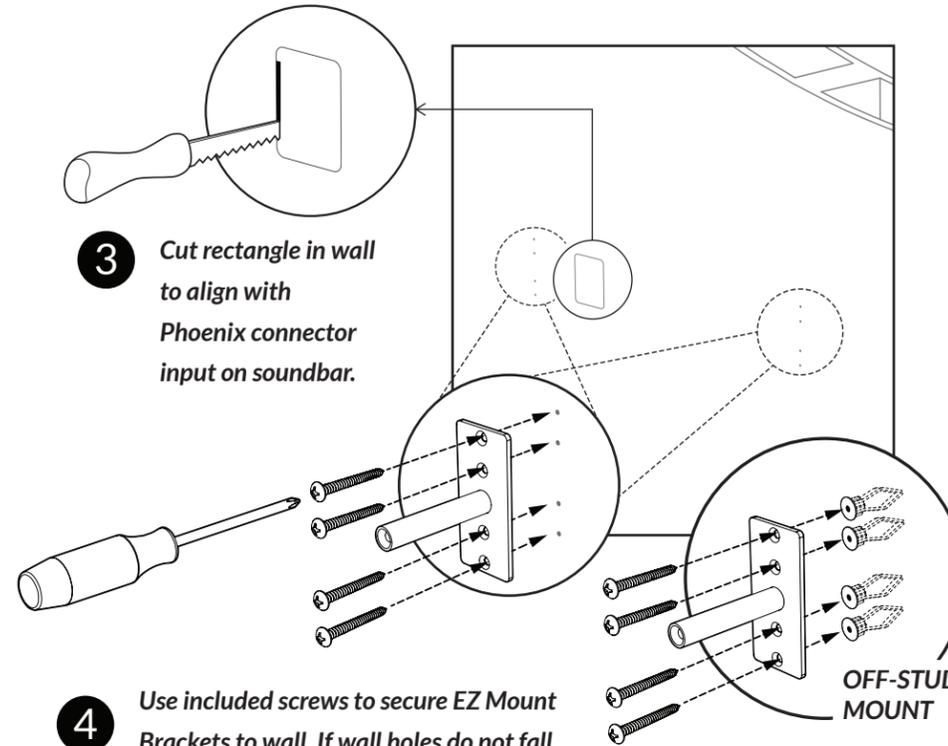


3 Cut rectangle in wall to align with Phoenix connector input on soundbar.

4 Use included screws to secure EZ Mount Brackets to wall. If wall holes do not fall on studs, use included anchors. **NOTE:** Anchors require 5/16" holes in wall.

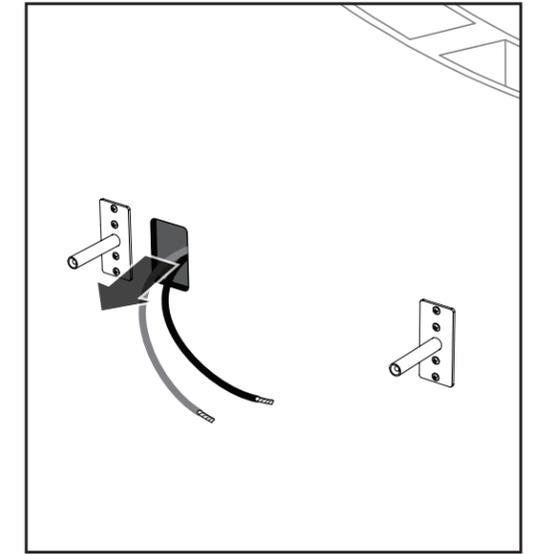


5 Pull wires through opening in wall.


Tighten screws for each port once wire is fully inserted

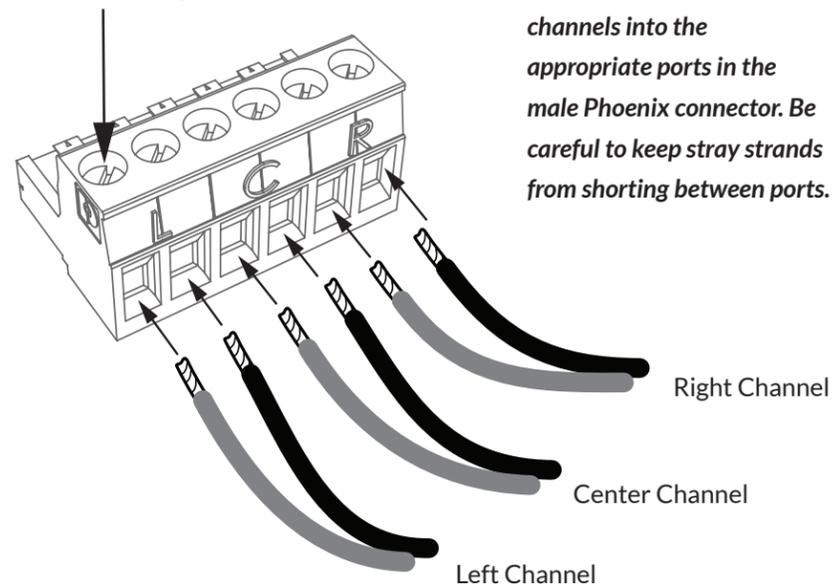

6 Depending on configuration, insert wires from available channels into the appropriate ports in the male Phoenix connector. Be careful to keep stray strands from shorting between ports.

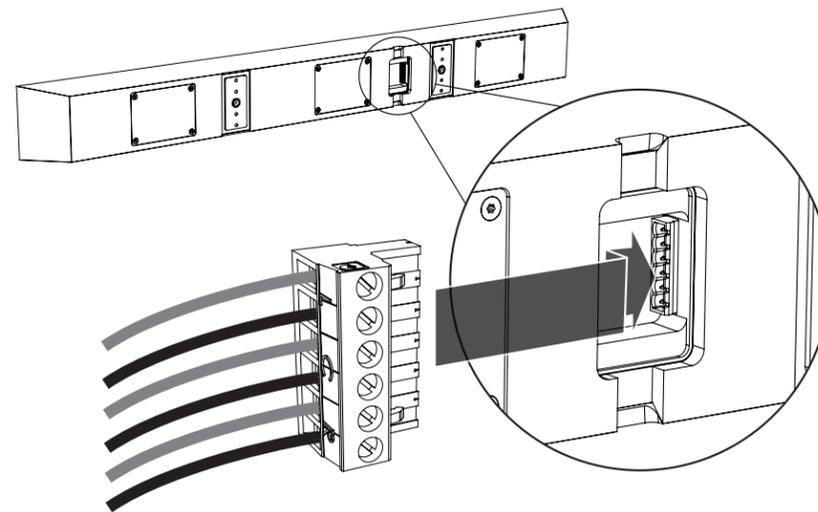

7 Insert male Phoenix connector into female Phoenix receptacle in back of soundbar until it clicks firmly into place. To remove, pull firmly on male Phoenix connector.

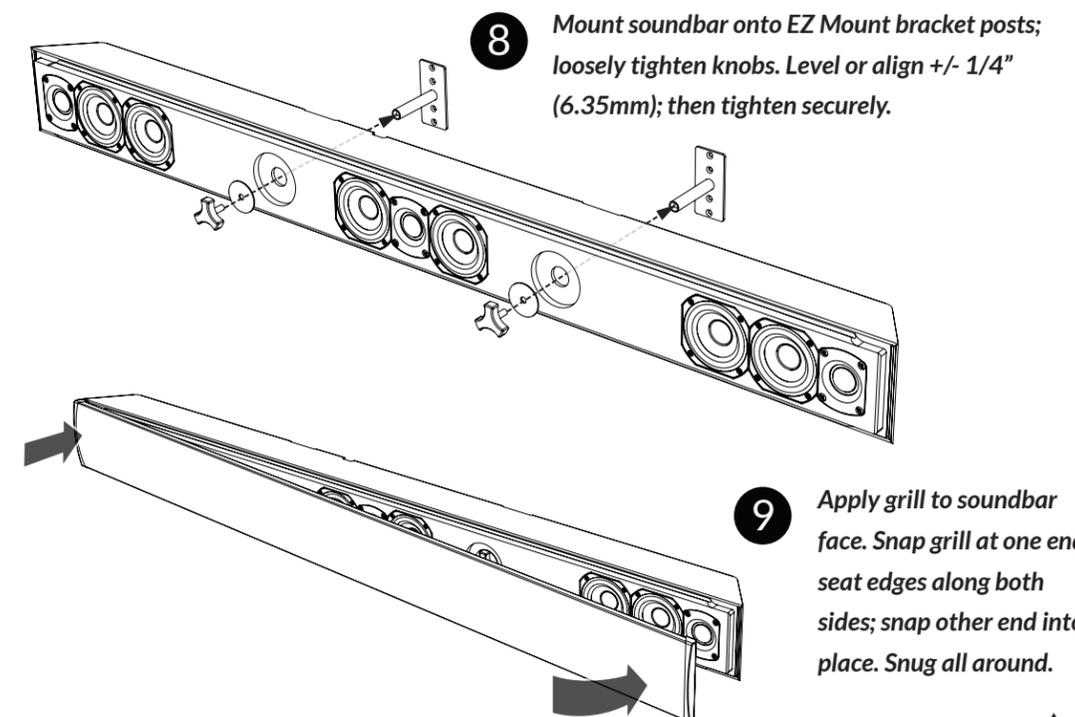

8 Mount soundbar onto EZ Mount bracket posts; loosely tighten knobs. Level or align +/- 1/4" (6.35mm); then tighten securely.

9 Apply grill to soundbar face. Snap grill at one end; seat edges along both sides; snap other end into place. Snug all around.