

ActionTEC Router Setup

Overview

Follow these steps for Router Firewall Setup for Wirepath™ DVRs with an ActionTec router. Some of the screens may look different; however the steps will be the same. If you have questions about your specific ActionTec device, please contact technical support.

Before Beginning


Complete the initial setup of the Wirepath™ DVR by following the instructions in the products owner's manual or the WPS-DVR Quick Start Guide.

The following information from the DVR setup is needed to complete the setup of the router:

- Static IP Address
- Control Port
- Data Port
- HTTP Port

Setting Up the Router

1. Before logging into the router, connect the DVR to the Network and turn it on.
2. Login to router using login information provided in user manual and select **Setup/Configuration**

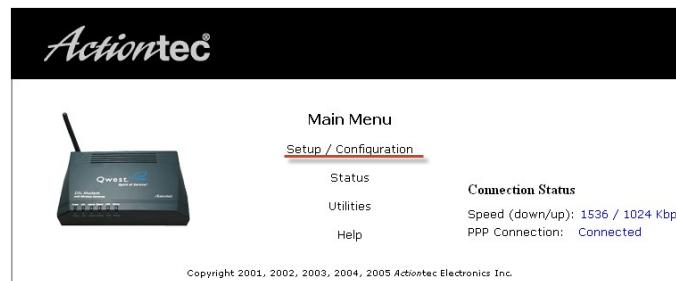

3. On the left, locate and select the **Advanced Setup** tab and then select the **Begin Advanced Setup** button at the bottom of the screen.


ActionTEC Router Setup

- On the left hand side, locate and select the **Port Forwarding** Link



- In the **IP Port Range** boxes enter 67 to 67 with protocol being **Both** and the **IP Address** being the Static IP of the DVR. Click **Add** to submit the exception.

Note: If **Both** is not an option under **Protocol**, than step 4 must be repeated twice for ports 67 and 68. Once for TCP and once for UDP and there will be a total of 5 exceptions as port 80 only requires TCP.

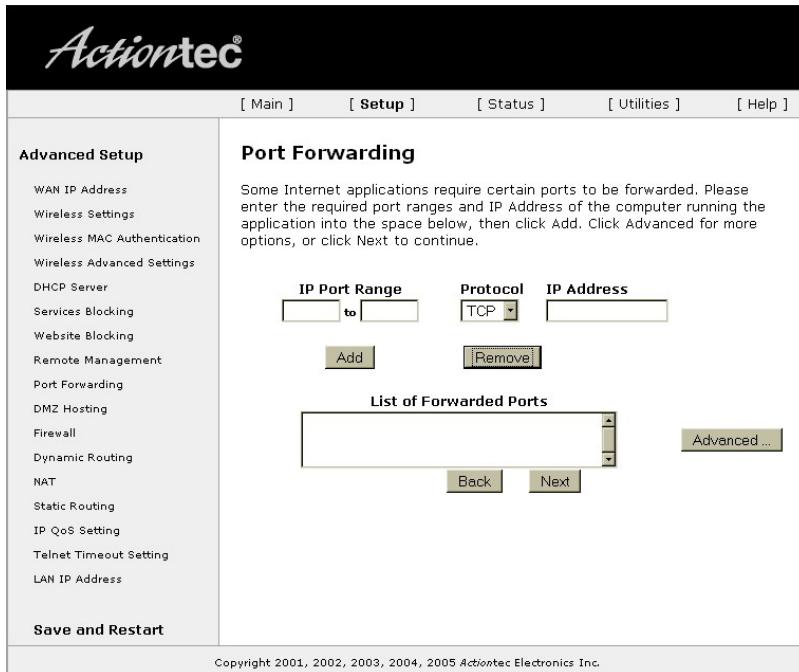

- Repeat step 4 with ports 67, 68 and 80. Once completed, there should be 3 or 5 exceptions depending on whether **Both** is a **Protocol** option or not. Save changes and reboot the router to make the changes take effect. Some routers do not require a reboot however it is recommended.

Contacting Technical Support

Phone: (866) 838-5052

Email: Techsupport@snapav.com