



ClareVue In-Wall Dimmer

CVL-IWD-10




Specifications

General

Rating	120 VAC, 60 Hz
Maximum Load	600W incandescent, 150W dimmable CFL/LED
Z-Wave	Signal frequency 908.4/916 MHz
Terminations	Requires line (hot), load, neutral, and ground. Traveler wire required for multi-pole installations
Operating Temperature	-32 to 104° F (-0° to 40° C)
Usage	Indoor only. Not for use with appliances or motors
Code Compliance	cUL Listed Complies with FCC and Industry Canada Regulations

This ClareVue In-Wall Dimmer can be used in scenes, schedules, and automations to control the ON/OFF, and dimming controls of incandescent, CFL, and LED light bulbs. The dimmer can be paired with up to 4 Accessory Add-on dimmers. Included in the package are white and light almond color paddles.

- Remote and manual ON/OFF, and dimming control
- May be used with up to 4 accessory add-on dimmers
- Works with existing ClareVue 1, 2, and 3-gang cover plates
- Advanced configuration: dim rates, LED status, invert switch (if unit is installed upside down)
- Requires neutral wire
- Configure night LED ON/OFF in ClareHome App
- Can be added to scenes, schedules, and automations

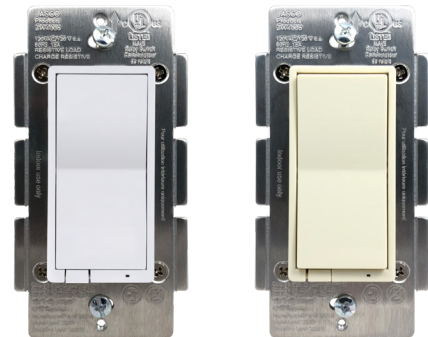

*Includes white and light almond color paddles.

By making home technology simple, Clare provides exclusive benefits to integrators, builders, and homeowners. We offer innovative home automation solutions, Class D amplifiers, media distribution, controllable lighting, and IP CCTV components. For more information, visit clarecontrols.com.