


Connecting X10 Cameras to Wirepath NVRs

The following steps guide you through adding your Luma X10 series camera to a Wirepath brand NVR.

Set up ONVIF in the Camera

1. In the camera settings, click **Advanced Network Settings**, then the **Integration Protocol** tab on the far right side.
2. Click the **Enable ONVIF** option at the top left, then click the **Add** button.
3. Create a new **User Name** (“ONVIF” in our example) and **Password**.
4. Set the user’s **Level** to **Administrator** and click **Save**.

Note: These steps must be taken for each Luma Camera

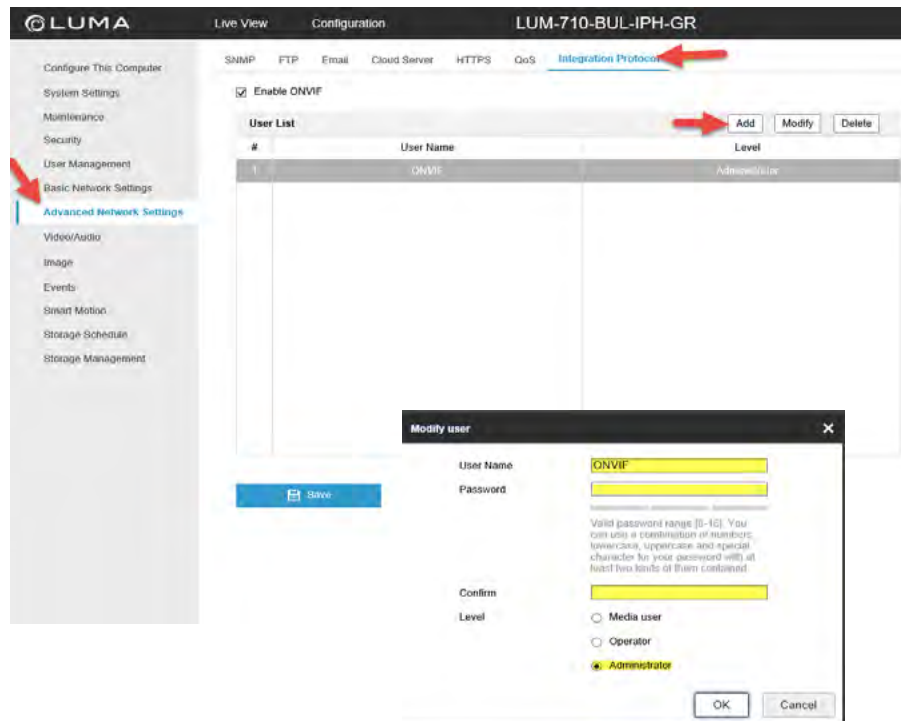

Set up the Wirepath NVR

1. In the Wirepath NVR, navigate to **NVR Settings** and click the **Camera** tab.
2. Click the **Enable** option and select **ONVIF Mode** from the **Mode** drop-down.
3. Enter the Luma camera’s **IP Address** and the **User Name** and **Password** created in the Luma camera. Then click **Save**.
4. You’ll see the camera image above the camera settings, with a successful connection.

