
Wall SMART	Model: WS SB FOR C4 LUX 4 GANG DEVICES C4-L-	Family: WALL-SMART	
		DWG NO. 007-4SA37-SPC	
	Model No.: 007-1SA37	PRODUCT SPEC.	REVISION B DATE 05/JuN./2025

Make Your Wall Smart


"WS SB FOR C4 LUX 4 GANG DEVICES C4-L-" - Product description:

The "WS SB FOR C4 LUX 4 GANG DEVICES C4-L-" is an adapter for in-wall flush installation of C4 LUX 4 GANG faceplate and C4-L-XX devices in solid board walls. The "WS SB FOR C4 LUX 4 gang devices C4-L-" firmly mounts the C4 LUX 4 GANG faceplate and C4-L-XX devices while allowing easy insertion, removal and operation.



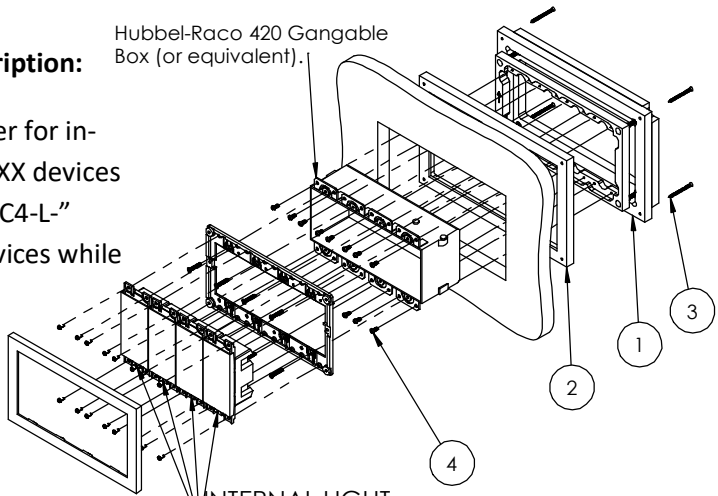


INTERNAL LIGHT SENSOR IS UNUSABLE IN THIS WALLMOUNT




Key features and benefits:

- Flush with the solid surface wall.
- Wall mount may be mounted in any orientation.
- Allows easy insertion and removal of the C4 LUX 4 gang faceplate and C4-L-XX devices.
- Wall mount contains depth calibration mechanism and spacer allowing installation in solid surface boards of 4.78 [0.19"] up to 33.66 [1.33"] thickness.
- See page 2 for routing dimensions.
- Designed for the use C4 LUX 4 gang faceplate and C4-L-XX devices (C4 LUX 4 gang faceplate and C4-L-XX devices are not included).
- Adapter kit contains:
    1. Wall adapter (X1)
    2. Spacer (X1)
    3. ST3x40 screws (X4)
    4. KA3.5X8 Screws (X16)

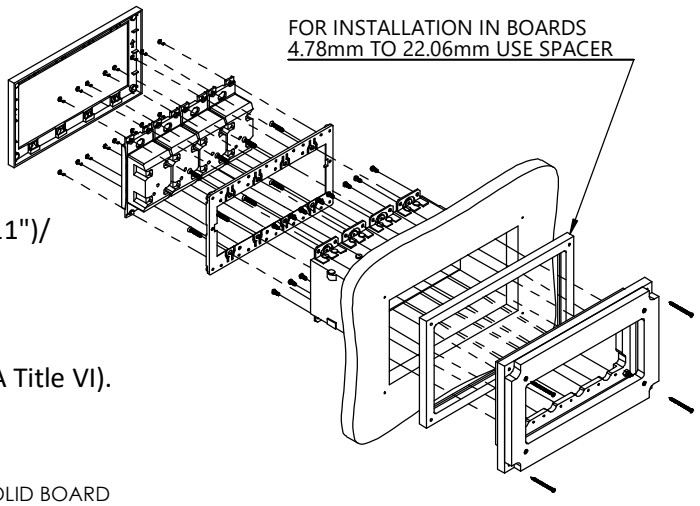


Key properties:

- Dimensions: (W/H/D): 248.2mm (9.77")/ 155.3mm (6.11")/ 43.5mm (1.71").
- Power Supply: None (manual adapter).
- Weight: 0.45Kg, 0.99lbs.
- Material: Moisture resistant MDF (compliant with TSCA Title VI).

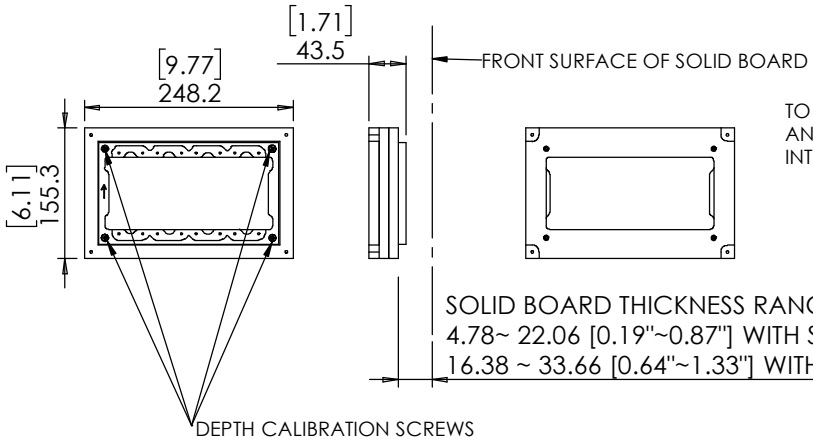

TO OPEN THE FACEPLATE, INSERT AND PUSH A THIN PLASTIC CARD INTO THE VERTICAL GAP



SOLID BOARD THICKNESS RANGE:
4.78~ 22.06 [0.19"~0.87"] WITH SPACER
16.38 ~ 33.66 [0.64"~1.33"] WITHOUT SPACER

INFORMATION CONTAINED HEREIN IS PROPRIETARY AND MAY NOT BE USED, REPRODUCED OR COPIED WITHOUT WRITTEN CONSENT OF WALL-SMART ©

Phone: (201) 205-2056 / info@wall-smart.com

CUTOUT ROUTING TEMPLATE - BACK VIEW
007-1SA37

PRINT THIS PAGE 1:1 SCALE

CONTACT WALL-SMART FOR DXF FILE

