



SR-SHELF-MoIP-V10-6U

Rev:180810-1325

STRONG® Vertical MoIP Shelf 10 Transmitters-6U

Description

The Strong Vertical MoIP Shelf (SR-SHELF-MOIP-V10-6U) is designed to hold up to ten (10) MoIP Transmitters (B-900-MOIP-4K-TX). Use a **device bracket** to attach devices to the **face plate**. Transmitters can be installed with the input and output connections facing outward or inward, making rack installation more versatile. For installs needing less than 10 transmitters, four blank brackets are provided to fill unused device slots.


NOTE: MoIP Receivers and MoIP Controllers are not compatible with this product.

Box Contents:

- 1× 6U Face Plate
- 10× Device Brackets
- 4× Blank Brackets
- 20× Transmitter to Bracket Screws
- Install Guide

Installation

1. Remove two **housing screws** from either the front or rear of the B-900-MOIP-4K-TX (transmitter) unit.
2. Align the screws with the holes in the **device bracket** and secure the **device bracket** in place with the two previously removed **housing screws** and two of the provided **transmitter to bracket screws**. See image below.
3. Repeat steps 1 and 2 for each additional transmitter.
4. Slide the device bracket with attached transmitter through the **face plate** and use the attached thumb screws to secure.
5. Repeat step 4 for additional transmitters, then use the attached thumb screws to install the blank bracket over any empty slots.
6. After all transmitters have been installed in the face plate, install the entire assembly to the front or back of a rack using four (4) rack screws (not supplied).

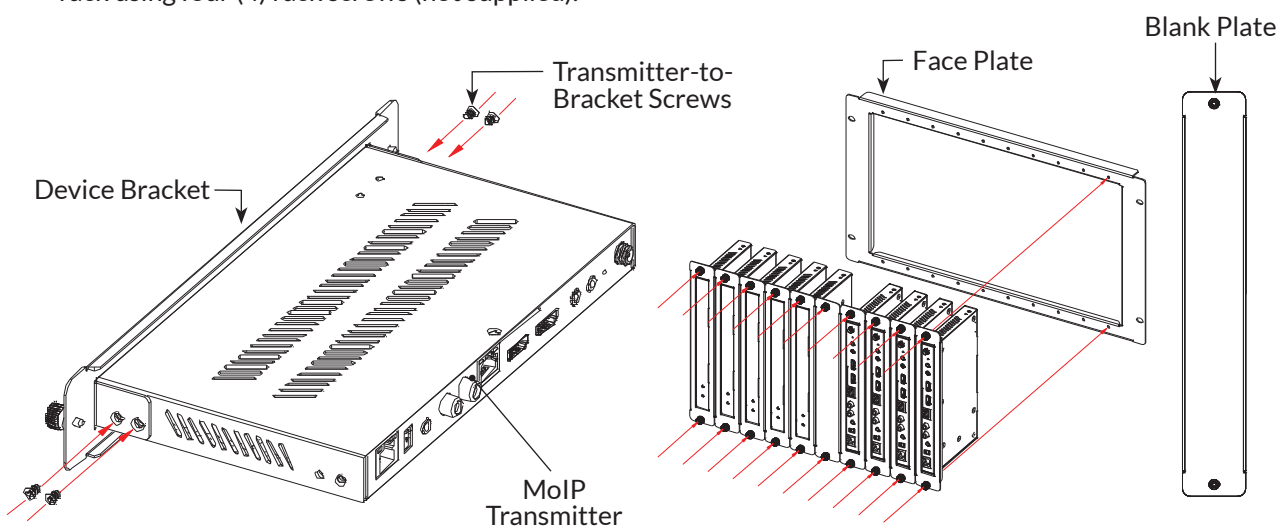

Contacting Technical Support

Phone: (866) 838-5052

(704) 909-5229

Email: TechSupport@SnapAV.com