



The Ultimate in Architectural Audio

Triad PDX architectural speakers use high-performance materials and the finest components like carbon fiber, Kevlar, Teteron, and dual voice coils for the ultimate audio experience.



Series 5

Interwoven Kevlar/Carbon Fiber Woofer

Reduces distortion, enhances bass, and provides better detail.

Upgraded Pivoting Teteron Dome Tweeter

Provides a smoother frequency response with better transient/impulse performance.

Tweeter and Woofer Adjustment Switches

Adjusts the woofer and tweeter levels to fine-tune high and low frequencies for the very best sound in your specific space.



Series 4

Woven Carbon Fiber Woofer

Offers improved power handling, superior bass performance, and stunning linear tonal balance.


Pivoting Teteron Dome Tweeter

Delivers higher sensitivity and smoother frequency response.

Tweeter Adjustment Switch

Adjusts the tweeter level to deliver detailed and clear sound in your specific space.

Shared Features



Born in Portland

Designed and engineered in the USA with ground-up woofer and tweeter design




Easy, Toolless Install

Installs in seconds with just the press of a button – no tools needed!




Seamless Installation, Your Way!

Remove the speaker module for safe storage offsite



Frameless Magnetic Grilles

Perforation pattern and color matched to Distributed Audio Series

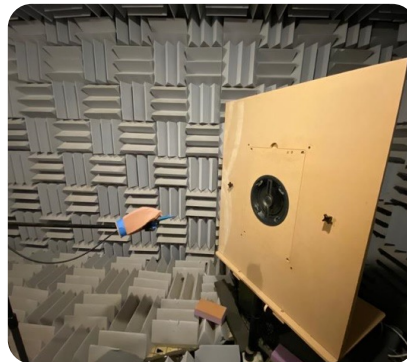


Classic Triad Voicing

Voiced in our anechoic chamber and timbre matched for the Triad sound



Cast Aluminum Tweeter Bar

Durable, acoustically inert, and offering install safety

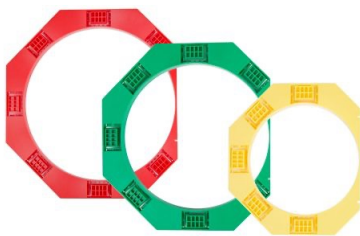

New Construction Brackets

Color coded with clip-in arms



Optional Rear Enclosures

Reduces sound propagation to adjacent rooms by up to 30dB



Upgradeable Grilles

Custom painted grilles available in round, square and rectangular

Series 5 Specs

Product	TS-PDX-IC65	TS-PDX-IC85	TS-PDX-IC65-ANG	TS-PDX-IW65	TS-PDX-IW85
Finished Dimensions: (LxW):	235mm 9.26"	270mm 10.64"	270mm 10.64"	320 x 217mm 12.6" x 8.56"	373 x 253mm 14.67" x 9.97"
Weight per speaker w/grille	5.65lbs 2.57Kg	6.47lbs 2.94Kg	6.34lbs 2.88Kg	5.79lbs 2.63Kg	6.25lbs 2.84Kg
Cutout Dimensions (mm)	211mm 8.3"	246mm 9.7"	246mm 9.7"	297 x 193mm 11.7" x 7.6"	348 x 229mm 13.7" x 9"
Mounting Depth w/o Enclosure (Measured from back of baffle)	126mm 4.97"	132mm 5.2"	132mm 5.2"	91mm 3.6"	91mm 3.6"
Mounting Depth with Enclosure (Measured from back of baffle)	157mm 6.2"	168mm 6.6"	168mm 6.6"	96.5mm 3.8"	96.5mm 3.8"
Frequency Response (+/- 3dB):	42Hz - 23KHz	35Hz - 23KHz	42Hz - 23KHz	42Hz - 23KHz	35Hz - 23KHz
Nominal Impedance:	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms
Minimum Impedance:	6.5 Ohms	6.5 Ohms	6.5 Ohms	6.5 Ohms	6.5 Ohms
Crossover Frequency:	2.8kHz	2.6kHz	2.8kHz	2.8kHz	2.5kHz
Crossover Type / Slope:	Linkwitz-Riley / 12dB	Linkwitz-Riley / 12dB	Linkwitz-Riley / 12dB	Linkwitz-Riley / 12dB	Linkwitz-Riley / 12dB
Power Handling (Max): (1.33x RMS)	160W	165W	160W	160W	175W
Power Handling (RMS):	120W	125W	120W	120W	130W
Sensitivity (dB) @ 1W/1M	90dB	91dB	90dB	90dB	91dB
Dispersion Angle	95°	100°	95°	110° H / 90° V	100° H / 90° V
Optimal Air Volume	20-25L	35-40L	20-25L	20-25L	35-40L
Switch 1 Type	Tweeter	Tweeter	Tweeter	Tweeter	Tweeter
Switch 1 Adjustment	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB
Switch 2 Type	Bass	Bass	Bass	Bass	Bass
Switch 2 Adjustment	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB	+2dB, Flat, -2dB
Dog Type:	Push Lock by Swarm	Push Lock by Swarm	Push Lock by Swarm	Push Lock by Swarm	Push Lock by Swarm
Dog Clamping Range	3/8" to 1-1/8"	3/8" to 1-1/8"	3/8" to 1-1/8"	3/8" to 1-1/8"	3/8" to 1-1/8"
Woofer Size:	6-1/2" (160mm)	8" (200mm)	6-1/2" (160mm)	6-1/2" (160mm)	8" (200mm)
Woofer Cone Material:	Interwoven Kevlar / Carbon Fiber	Interwoven Kevlar / Carbon Fiber	Interwoven Kevlar / Carbon Fiber	Interwoven Kevlar / Carbon Fiber	Interwoven Kevlar / Carbon Fiber
Woofer Surround Material:	NBR (Buna-N rubber)	NBR (Buna-N rubber)	NBR (Buna-N rubber)	NBR (Buna-N rubber)	NBR (Buna-N rubber)
Woofer Voice Coil Diameter:	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"
Woofer Excursion (Peak to Peak):	8.5mm	8.5mm	8.5mm	8.5mm	7.6mm
Woofer Magnet Type	Ferrite	Ferrite	Ferrite	Ferrite	Ferrite
Speaker Connector Type:	Spring Loaded Binding Posts	Spring Loaded Binding Posts	Spring Loaded Binding Posts	Spring Loaded Binding Posts	Spring Loaded Binding Posts
Tweeter Size:	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)
Tweeter Material:	Teteron Dome	Teteron Dome	Teteron Dome	Teteron Dome	Teteron Dome
Tweeter Mechanism:	Pivoting +/- 12.7°	Pivoting +/- 12.7°	Pivoting +/- 12.7°	Pivoting +/- 12.7°	Pivoting +/- 12.7°
Operating Temperature (Min / Max):	-20C to +50C	-20C to +50C	-20C to +50C	-20C to +50C	-20C to +50C

