

# Evolve™ Hybrid Rack System 2.0 Adjustable Height Shelving Rack

SR-EHR2-SYSTEM-1015, SR-EHR2-SYSTEM-1624



## Package Contents


- A Collapsed rack (1)
- B Pre-installed pivot screws (8)
- C Triangle thumb screws (8)
- D Shelves (quantity varies per size)
- E Optional corner covers (8)
- F Pre-installed quarter turn lock pin
- G Pre-installed gray shelf release button
- H #10-32 × 3/8" with nylon washers (18: 10-15U model) (36:16-24U model)
- I EZ glide runners
- J #6-19 × 1/4" runner screws (16, not shown)
- K Hex wrench (not shown)

## Key Features

- Rack height adjustable from 10-15U or 16-24U
- No tools required
- EZ glide runners (for ease of mobility)
- Easy to reverse or flip over if rack-mounted gear is preferred to be on top, bottom, rear, or front
- Shelves with Quick Adjust Technology
- EIA-310-D U spacing and width


## Rack Assembly

1. Unbox the rack and lay it flat on the floor. Remove the plastic covers from the four quarter turn lock pins (F). Pull the top of the rack so that the pillars are upright (A).
2. Insert the EZ glide runners (I) at each corner, top and bottom, and secure them with the runner screws.
3. Lock the rack in the upright position by inserting triangle thumb screws (C) opposite the pivot screws (B). Tighten screws (B) and (C) using the included hex wrench (K).
4. To adjust the height of the rack:
  - A. Pull out and rotate each the four quarter-turn lock pins (F) counterclockwise.
  - B. Slide the top of the rack up until the desired height is achieved.
  - C. Re-tighten the lock pins. Make sure they return to the locked position.
5. To adjust the shelves:
  - A. While depressing the shelf release buttons (G), slide the stationary pins into position and rotate the shelf into place.
  - B. Release the buttons and ensure the shelf is locked into place and level.
6. (Optional) Attach the corner covers (E) for a finished look.
7. (Optional) For an even cleaner look, attach the caster base (X, sold separately).

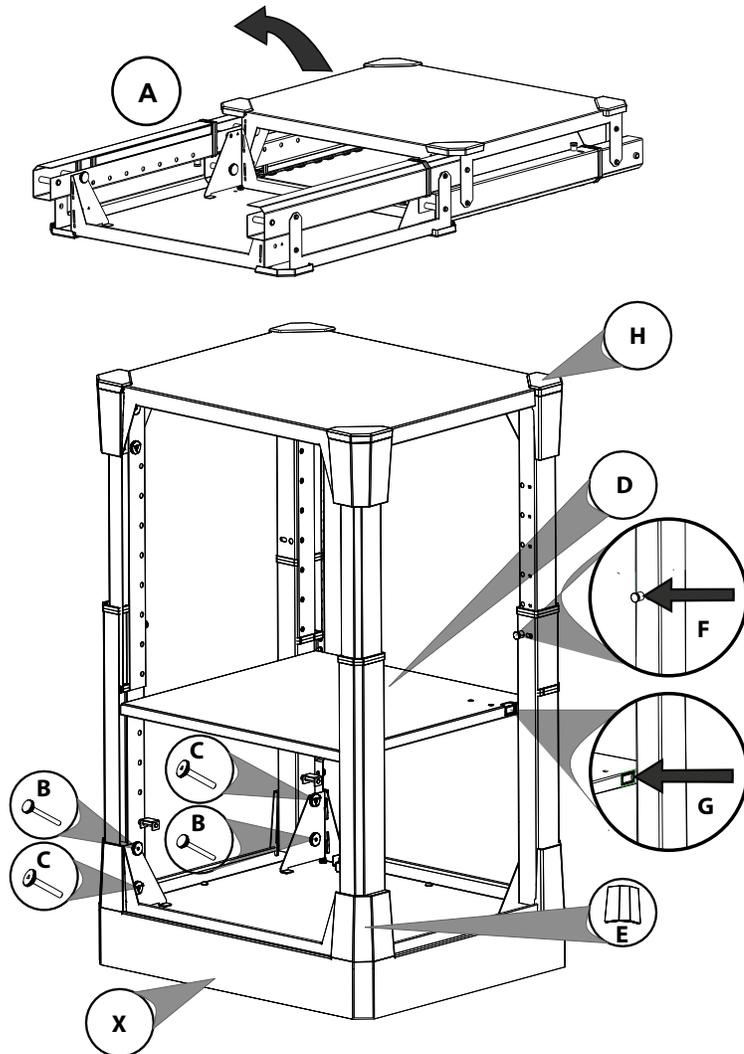


Product Data Sheet


**Evolve™ Hybrid Rack System 2.0**  
**Adjustable Height Shelving Rack**

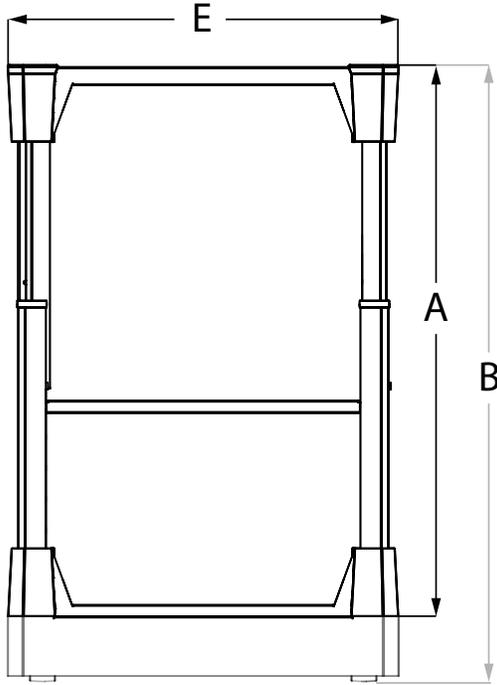

Front

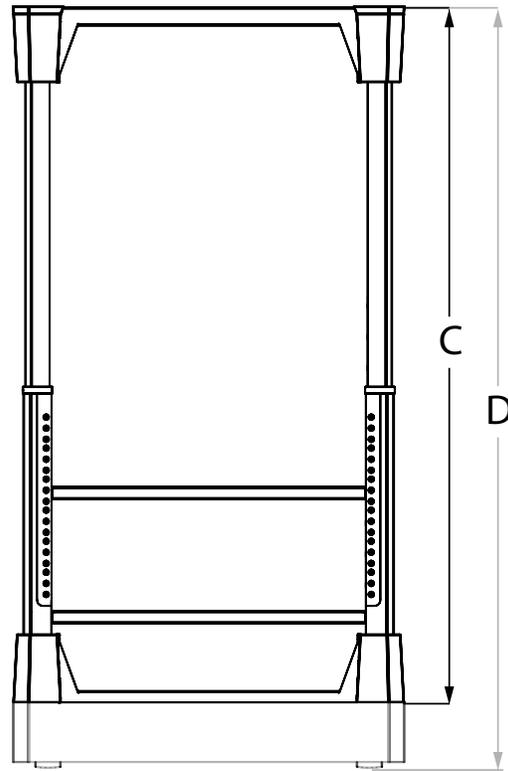

Back

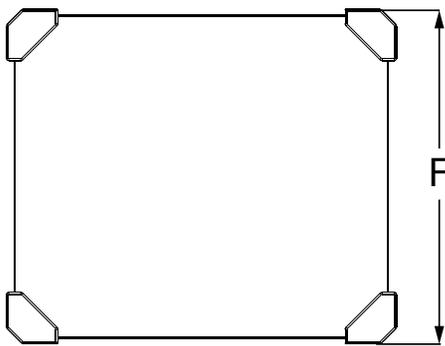

Top

Product	Construction	Shelves	A - Min. Height without Casters	B - Min. Height with Casters*	C - Max. Height without Casters	D - Max. Height with Casters*	E - Width	F - Depth	Max Load Capacity
SR-EHR-SYSTEM-1015	Steel with Deep Black Powder Coat	2	22.85"	26.05"	31.6"	34.8"	22.06"	18.64"	400 lbs
SR-EHR-SYSTEM-1624		3	36.85"	40.05"	50.85"	54.05"			

\*Caster Base (SR-EHR2-CASTERBASE) sold separately



**Lifetime Limited Warranty**

All Strong™ products have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products that have been abused, modified, or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

For Technical Support: 1.866.838.5052