

18/6 RISER RATED, UNSHIELDED SECURITY & CONTROL CABLE



18 AWG 6 Stranded Conductors

Ratings
Approvals

CMR, CL3R, FT4
ETL Listed

Construction

Conductor
Conductor Count
Insulation
Insulation Colors
Lay Length
Shielding
Rip Cord
Jacket
Overall Diameter

18 AWG 19 Strand Bare Copper
6
PVC (0.011" nom.)
Black, Red, White, Green, Brown, Blue
3.60" nom.
N/A
Yes
PVC (0.016" nom.)
0.211" nom.


Print Legend

ADI PRO P/N RN-XXXXXXX OXYGEN
FREE 6C18 3180662 C(ETL)US CL3R 75C,
CMR FT4 RoHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage
DC Resistance
Capacitance
Temperature
Flame Rating
RoHS Compliant
Country of Origin

300 Volts max.
6.66 Ohms/1000' at 20°C
22.7 pF/ft. nom.
-20°C to 75°C
UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
Yes
CHINA

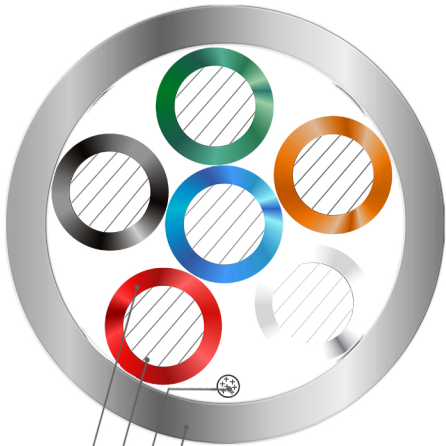

Center Conductor
Insulation
Rip cord
Jacket

PART#	COLOR	LENGTH	BOX
RN-84SR509	GREY	500FT	EXPRESS BOX



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands