

# USB EXTENDER 2.0 (480MBPS)



0E-USB2EXT

SUPPORTS SIGNAL EXTENSION OF A USB-HID DEVICE UP TO 80M/263FT AND A USB 2.0 STORAGE DEVICE UP TO 60M/197FT. BUILT-IN USB HUB AT RECEIVER PROVIDES FOUR USB 2.0 PORTS. TRANSMITTER CAN BE POWERED BY A USB HOST (E.G. PC).

### SPECIFICATIONS:

# Technical

- Input/Output Port: Transmitter: 1 x USB TYPE-B, 1 x UTP OUT Receiver: 1 x UTP IN. 1 x DC 12V IN. 4 x USB2.0
- Maximum Data Rate:
- USB 2.0 up to 480Mbps
   Transmission Distance:
  - Trainstrission Distance.

    Cat 5e/6: Up to 265ft/80m for USB-HID device;
    up to 197ft/60m for USB 2.0 storage device
    Note: We recommend the use of T568B straightthrough category cables.
- · Warranty: 2 years

- PART#: 0E-USB2EXT
- LIPC: 840049305793

## General


- Operating Temperature:
  - 0°C to 45°C (32°F to 113°F)
- Storage Temperature:
  - -20°C to 70°C (-4°F to 158°F)
- Humidity: 10% to 90%, non-condensing
- · ESD Protection:
  - Human Body Model:
  - ±8kV (Air-gap discharge)/ ±4kV (Contact discharge)
- Surge Protection: Voltage: ±1 kV
- Power Supply: DC 12V 1A
- Power Consumption: 4.5W
- Device Dimension (Transmitter/Receiver): 9cm x 2.5cm x 7.1cm/3.54" x 0.98" x 2.8"
- Product Weight (Transmitter/Receiver): 0.35kg/0.77lb

For more information please call 1-833-574-9124 or email AVARRO@adiglobal.com

To learn more about AVARRO products visit avarro.adiglobaldistribution.us



0E-USB2EXT

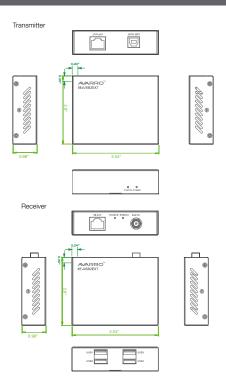

For more information please call 1-833-574-9124 or email AVARRO@adiglobal.com

To learn more about AVARRO products visit avarro.adiglobaldistribution.us