

520
SERIES



Summary

This low-profile bullet IP camera features 8MP resolution for 4K viewing. With 24/7 Color technology, the camera can show full color scenes even in low lighting conditions. With OvrC, on-site or remote configuration is a breeze, no longer requiring you to tediously navigate each camera's local UI. Adjust image settings in real-time, setup recordings, and more all via OvrC. Control System integration is always top of mind, and this camera is packed with features for Control4 along with many other popular control systems.

Features


- AI-filtered events
- H.265+/H.265/H.264+/H.264/MJPEG coding
- Max.resolution: 8MP (3840 × 2160)
- 24/7 full color imaging
- 3D DNR, true WDR, HLC, BLC and ROI coding
- 1CH audio input; 1CH built-in MIC
- Built-in micro SD card slot; up to 256GB
- DC12V/PoE power supply
- Support four streams
- IP67 ingress protection
- Remote monitoring support via Luma View app

Mounting Accessories (optional)



Dimensions

Unit: mm

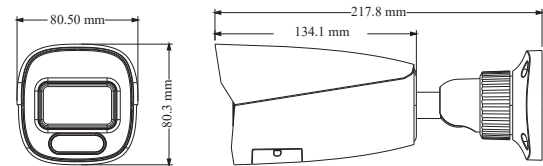

Specifications

Product	LUM-520-IP-BFC
Resolution	2592 x 1944
Shutter Speed	1/2s - 1/100000s
Min. Illumination	0.006 Lux, AGC ON; 0 Lux with LED ON, AGC ON
Lens	2.8mm
Aperture	F1.0
Field of View	Horizontal FoV: 97°/Vertical FoV: 72°/Diagonal FoV: 128°
White LED Range	20 - 30m
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital Noise Reduction	Yes
Angle Adjustment	Pan: 0° - 360°/Tilt: 0° - 90°/Rotation: 0° - 360°
Video Compression	H.265+/H.265/H.264+/H.264
Main Stream	H.265(+): 2592 x 1944 30fps H.264(+): 2592 x 1944 30fps H.265(+): 2592 x 1520 30fps H.264(+): 2590 x 1520 30fps H.265(+): 2560 x 1440 30fps H.264(+): 2560 x 1440 30fps H.265(+): 2304 x 1296 30fps H.264(+): 2304 x 1296 30fps H.265(+): 1920 x 1080 30fps H.264(+): 1920 x 1080 30fps H.265(+): 1280 x 720 30fps H.264(+): 1280 x 720 30fps
Sub & Third Stream	H.264: 704 x 480 (30fps)
Fourth Stream	H.265: 1920 x 1080 30fps H.264: 1920 x 1080 30fps MJPEG: 1920 x 1080 30fps H.265: 1280 x 720 30fps H.264: 1280 x 720 30fps MJPEG: 1280 x 720 30fps
Audio & Alarm	Audio input
Storage	Built-in micro SD card slot/Up to 256GB
Reset Button	Yes
ONVIF Compliance	Yes/Yes
NDAA Compliant	Yes/Yes
Basic Event	Motion Detection/SD Card Full/SD Card Error
AI Event	Line Crossing/Region Intrusion/Region Entrance/Region Exit/Target Counting
AI Category	Human/Motor Vehicle/Non-motor Vehicle
Protection	IP67
Power Supply	DC12V/PoE
CVBS Output	No
Power Consumption	< 7W
Operating Temperature & Humidity	-22 F - 140F (-30 C - 60C) Less than 95% (non-condensing)
Dimensions & Weight	217.8mm x 80.5mm x 80.3mm, 0.68KG (1.5lbs)
Certifications	ETL Listed, CE, FCC