

### 150-Series Bullet Analog Outdoor Camera with IR (420 TVL | White)



This outdoor bullet camera is a great all-around performer, providing reliable surveillance in a discrete form factor. Its outdoor rating and vandal resistance allows it to go where many comparable camera models can't – like loading docks, offices, garages and other areas needing general surveillance.

#### Features



3.6mm Lens



420TVL




IR



IP66

#### Compensates for Bright Backgrounds

Backlight compensation reduces silhouetting, so you see foreground subjects clearly – even when they're positioned in front of a bright background light source.

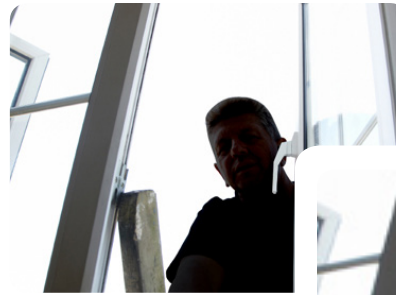

#### Works in Residential and Commercial Settings

From office areas with controlled access, to front doors, back doors, garages and other residential spaces – this camera addresses a variety of everyday surveillance needs with ease.

#### Built to Last

Thanks to an IP66 outdoor rating, this camera can be installed outside and is strong enough to stand up to the elements.




#### 5-Year Limited Warranty

This camera has a 5-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).

### 150-Series Bullet Analog Outdoor Camera with IR (420 TVL | White)

#### DIMENSIONS

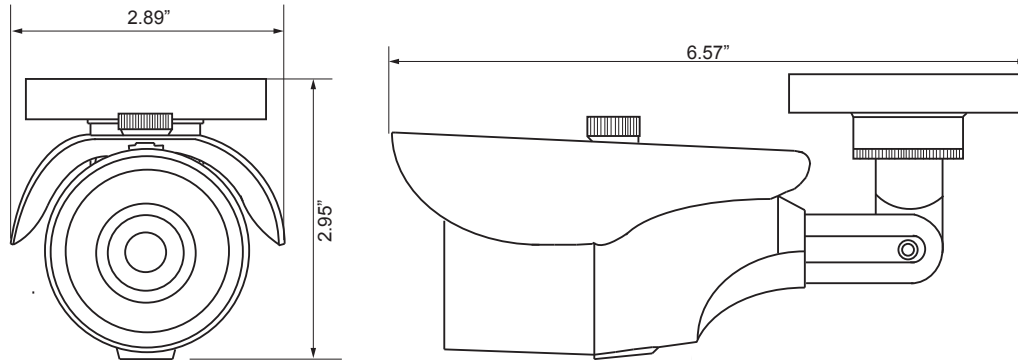

#### SPECIFICATIONS

Image Sensor	1/4" Sony Color Super HAD CCD
Number of Pixels	NTSC: 510 x 492 (H)x(V)
Lens	3.6mm Fixed, Horizontal FOV 50°
Shutter Control	<NTSC.160~1/100,000 sec
Auto Electronic Shutter	ON
Auto Gain Control	ON
Back Light Compensation	ON
Auto White Balance	ON
Sync. Mode	Internal Sync
Scanning System	2:1 Interlace
Resolution	420 TV Lines
S/N Ratio	>48dB

Gamma	0.45
Minimum illumination	.3 Lux color, 0 Lux IR on
IR Range	50ft
Horizontal Sync. Frequency	NTSC: 15.734KHz
Video Output	1.0Vp-p,75ohm
Power Source	3.6W-300mA
Power Consumption	IR On: 300mA max; IR Off: 80mA Max
Operating Temperature	14°F-122°F
Certifications	CE, FCC, ROHS
Weatherproof	IP66 Grade
Dimensions	6.57"(L) x 2.95"(H) with sun shade and bracket fully extended
Net Weight	.77 lb

#### 5-Year Limited Warranty

This camera has a 5-Year Limited Warranty. The warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, disassembled or improperly installed. Products to be repaired under this warranty must be returned to Snap AV or a designated service center with prior notification and an assigned return authorization number (RA).